

Specifications:

Material And Finish:

Insulator:Nylon 6T UL94V-0 Color:Black

Contact:Brass

Plated:See Ordering Information

Rating:

Current Rating:2.0 Amp

Voltage Rating:150V AC/DC

Operating Temperature Range:-40°~+105°C

Electrical:

Contact resistance:20m Ohm Max

Insulator resistance:1000M ohm min.

Withstanding Voltage:500V AC/Minute

Ordering Information

20032R-XXXXXX-NX

1 2 3 4 5

1: — Series No.

2: — R:R/A Type

3: — No. of Positions

4: — A:Gold Flash





H:Selective Gold Plated

Y:30u" Gold on contact;Tin on tail


5: — A:In bag

B:Tube

C:Tray

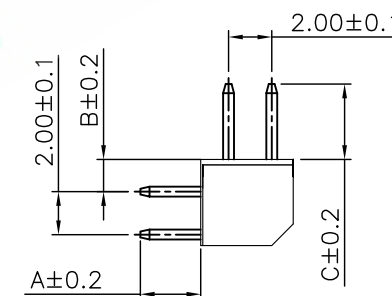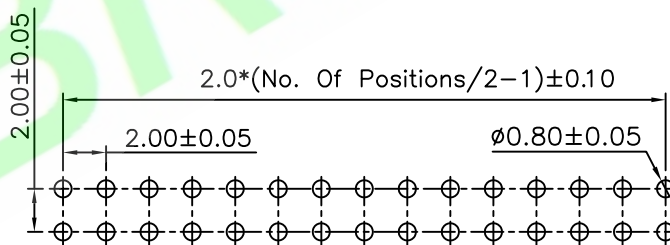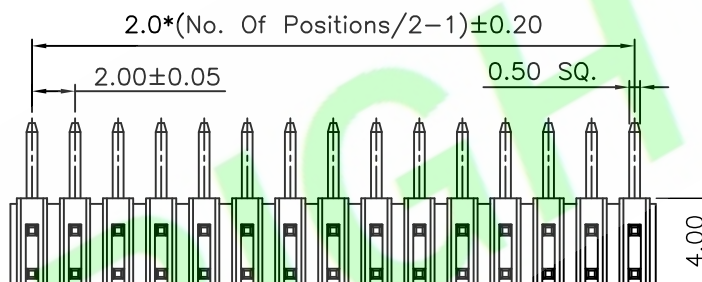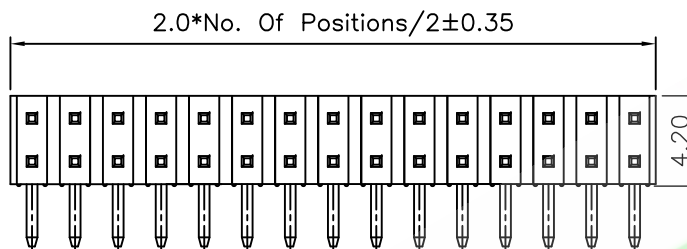

Recommended PCB Layout

5X				DR.BY.: Aaron	GENERAL TOLERANCE:		PART NO : 20032R-XXXXXX-NX	HJBRIGHT[®] 東莞市華晶電子有限公司 BRIGHT-E ELECTRONIC TECHNOLOGY LIMITED			
4X					LINEAR	ANGLES	DWG. NO.:				
3X				CHKD.: Tony	x.: ±0.30	x': ±5.0°	TITLE : 2.0mm Pitch Pin Header R/A Type		SHEET: 1/1		A4
2X					x.x: ±0.20	x.x': ±3.0°			SCALE: 1:1		
1X	ORIGINAL	Aaron		APPD.:	x.xx: ±0.15	x.xx': ±2.0°	DATE: 26-Jul-2018	UNIT: mm	THIRD ANGLE PROJECTION		
REV.	DESCRIPTION	DR.BY	ECN. NO.	Billy	x.xxx: ±0.10	x.xxx': ±1.0°					