


Plated: See Ordering Information

Operating Temperature Range: $-40^{\circ}\sim+105^{\circ}\text{C}$

Withstanding Voltage:500V AC/Minute

$$\overline{1} \quad \overline{2} \quad \overline{3} \quad \overline{4} \quad \overline{5}$$

- 5: — B:In Tube
C:In Tray
F:W/Cap In Tape&Reel

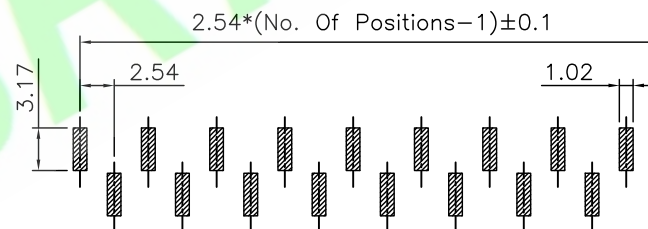

Recommended PCB Layout

5X				DR.BY.:	GENERAL TOLERANCE:		PART NO : 25411M-XXXXXX-NX	HJBRIGHT® 東莞市華晶電子有限公司 BRIGHT-E ELECTRONIC TECHNOLOGY LIMITED			
4X				Apra	LINEAR	ANGLES	DWG. NO.:				
3X				CHKD.:	x.: ±0.30	x': ±5.0°	TITLE : 2.54mm Pitch Pin Header SMT Type		SHEET: 1/1		A4
2X				Aaron	x.x: ±0.20	x.x': ±3.0°			SCALE: 1:1		
1X				APPD.:	x.xx: ±0.15	x.xx': ±2.0°	DATE: 11-Oct-2017	UNIT: mm	THIRD ANGLE PROJECTION		
REV.	DESCRIPTION	DR.BY	ECN. NO.	Billy	x.xxx: ±0.10	x.xxx': ±1.0°					
1	2	3	4	5	6	7	8				