
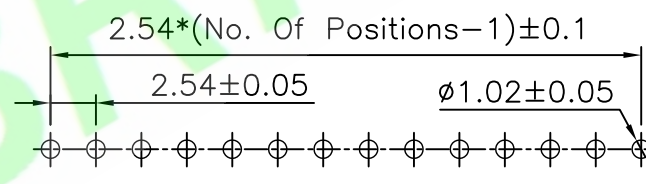
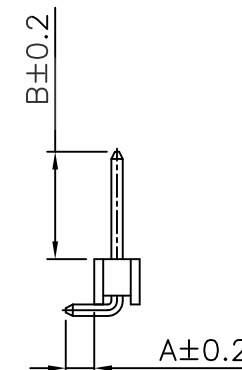
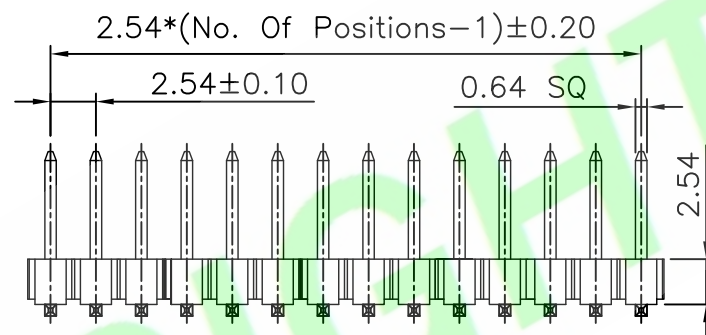


Plated: See Ordering Information

Operating Temperature Range: $-40^{\circ}\sim+105^{\circ}\text{C}$

Withstanding Voltage:500V AC/Minute

C:\In Tray

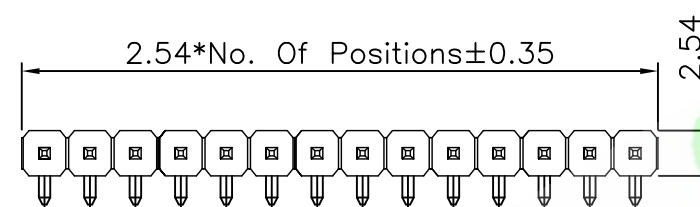

Recommended PCB Layout

5X				DR.BY.:	GENERAL TOLERANCE:		PART NO : 25411R-XXXXXX-NX		HJBRIGHT [®] 東莞市華晶電子有限公司 BRIGHT-E ELECTRONIC TECHNOLOGY LIMITED			
4X				Samson	LINEAR	ANGLES	DWG. NO.:					
3X				CHKD.:	x.: ±0.30	x': ±5.0"	TITLE :		SHEET: 1/1			A4
2X				Tony	x.x: ±0.20	x.x': ±3.0"	2.54mm Pitch Pin Header R/A Type		SCALE: 1:1			
1X	ORIGINAL	Samson		APPD.:	x.xx: ±0.15	x.xx': ±2.0"			DATE: 5-Nov-2013			
REV.	DESCRIPTION	DR.BY	ECN. NO.	Billy	x.xxx: ±0.10	x.xxx': ±1.0"						

BRIGHT-E ELECTRONIC TECHNOLOGY LIMITED

A4

THIRD ANGLE PROJECTION

UNIT: mm