





Plated:See Ordering Information

Operating Temperature Range: $-40^{\circ}\sim+105^{\circ}\text{C}$

Withstanding Voltage:500V AC/Minute

$$\overline{1} \quad \overline{2} \quad \overline{3} \quad \overline{4} \quad \overline{5}$$

- 1:— Series No.
2:— S: Straight Type
3:— No. of Positions
4:— A: Gold Flash
H: Selective Gold Plated
Q: Tin Plated
5:— A: In bag

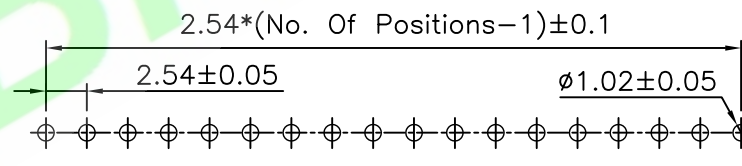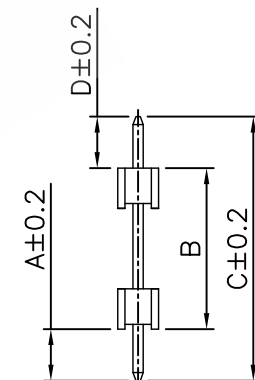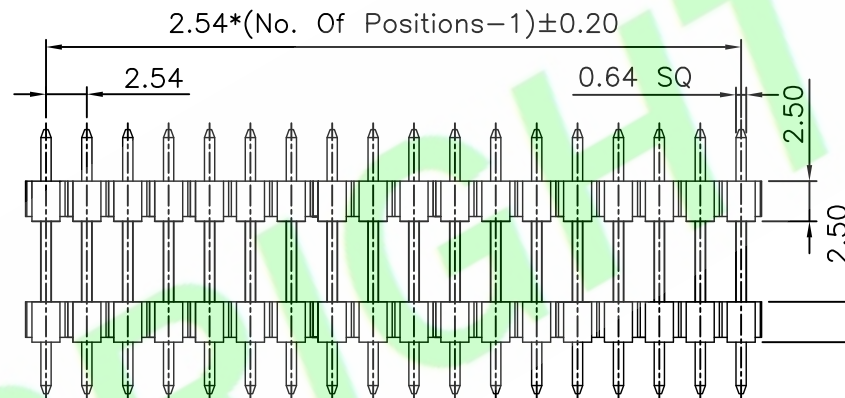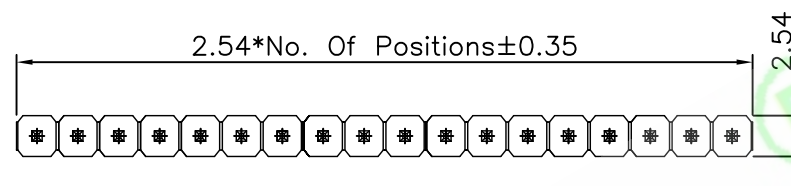

Recommended PCB Layout

5X			DR.BY.: Samson	GENERAL TOLERANCE:		PART NO : 254112S-XXXXXX-NX		HJBRIGHT 東莞市華晶電子有限公司 BRIGHT-E ELECTRONIC TECHNOLOGY LIMITED							
4X					LINEAR	ANGLES	DWG. NO.:								
3X			CHKD.: Tony	X.: ±0.30	X: ±5.0°	TITLE : 2.54mm Pitch Pin Header Straight Type		SHEET: 1/1			A4				
2X				X.X: ±0.20	X.X: ±3.0°			SCALE: 1:1							
1X	ORIGINAL	Samson	APPD.:	X.XX: ±0.15	X.XX: ±2.0°	DATE: 28-Feb-2018		UNIT: mm				THIRD ANGLE PROJECTION			
REV	DESCRIPTION	DR.BY	ECN. NO.	Billy	X.XXX: ±0.10	X.XXX: ±1.0°									
1		2		3		4		5		6		7		8	