


Insulator:PA6T UL94V-0 Color:Black
Contact:Brass

Operating Temperature Range: $-40^{\circ} \sim +105^{\circ} \text{ C}$


Withstanding Voltage:500V AC/Minute

1 2 3 4 5

- 1:—Series No.
2:—S:Straight Type
3:—No. of Positions
4:—A:Gold Flash
H: PdNi 28u”+Gold 4u” on Contact;
Matte Tin on tail
5:—A:In bag
B:In Tube
C:In Tray
F:W/Cap in Tape&Reel

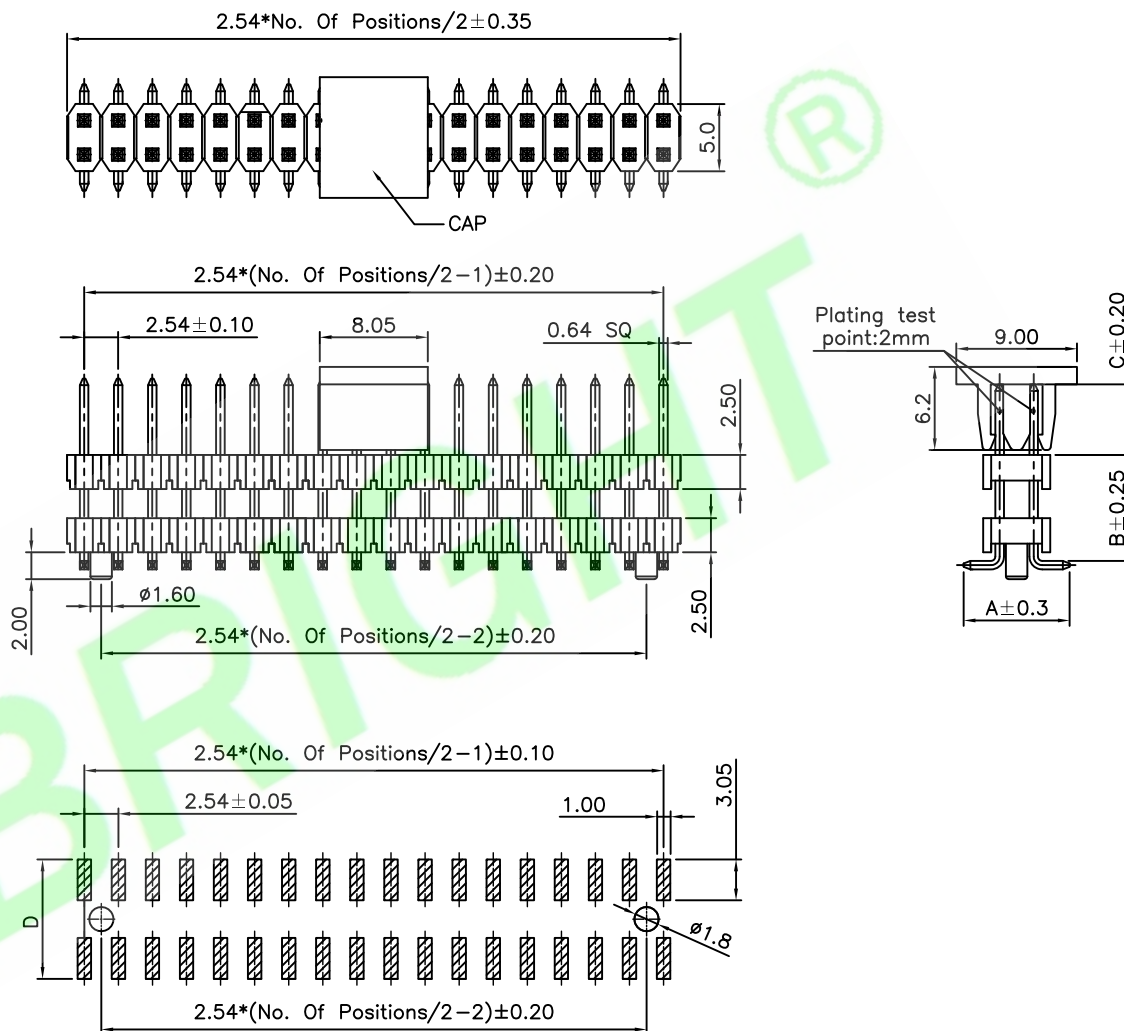

Recommended PCB Layout(Tolerance:0.05mm)

5X			DR.BY.: Samson	GENERAL TOLERANCE:		PART NO : 254122M-XXXXXX-NX	HJBRIGHT 東莞市華晶電子有限公司 BRIGHT-E ELECTRONIC TECHNOLOGY LIMITED		
4X				LINER	ANGLES	DWG. NO.:	SHEET: 1/1		A4
3X			CHKD.: Tony	x.: ±0.30	x': ±5.0"	TITLE :	SCALE: 1:1		
2X				x.x: ±0.20	x.x': ±3.0"	2.54mm Pitch Pin Header smt Type	UNIT: mm		
1X	ORIGINAL	Samson	APPD.: Billy	x.xx: ±0.15	x.xxx: ±2.0"	DATE: 5-Sep-2013			
REV.	DESCRIPTION	DR.BY	ECN. NO		x.xxx: ±1.0"				