

Insulator:LCP UL94V-0 Color:Black
Contact:Phosphor Bronze




Current Rating:0.5 Amp
Voltage Rating:100V AC/DC
Operating Temperature Range:-40°~+105°C

Contact resistance:30m Ohm Max
Insulator resistance:500M ohm min.
Withstanding Voltage:500V AC/Minute

PL03M-80X-20-X

$$\begin{array}{ccccc} \overline{\quad} & \overline{\quad} & \overline{\quad} & \overline{\quad} & \overline{\quad} \\ 1 & 2 & 3 & 4 & 5 \end{array}$$

- 1:— Series No.
2:— M:SMT Type
3:— No. of Positions(80)
4:— A:Gold Flash
5:— C:In Tray
D:Tape&Reel

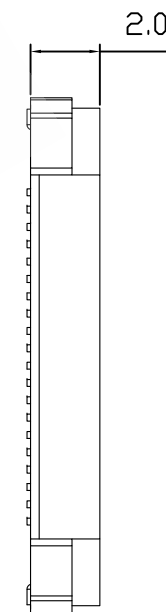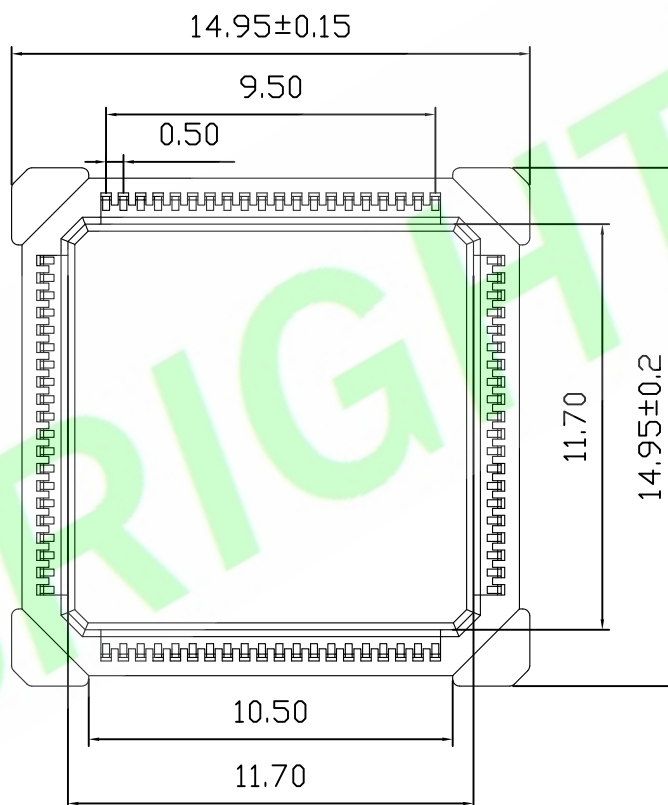

5X			DR.BY.:	GENERAL TOLERANCE:		PART NO : PL03M-80X-20-X	HJBRIGHT[®] 東莞市華晶電子有限公司 BRIGHT-E ELECTRONIC TECHNOLOGY LIMITED					
4X			Samson	LINEAR	ANGLES					DWG. NO.:		
3X			CHKD.:	x.: ±0.30	x': ±5.0°	TITLE : 0.50mm Pitch PLCC SMT Type				SHEET: 1/1		A4
2X			Tony	x.x: ±0.20	x.x': ±3.0°					SCALE: 1:1		
1X	ORIGINAL	Samson	APPD.:	x.xx: ±0.15	x.xx': ±2.0°					UNIT: mm		
REV.	DESCRIPTION	DR.BY	ECN. NO.	Billy	x.xxx: ±0.10	x.xxx': ±1.0°	DATE: 12-Sep-2013	THIRD ANGLE PROJECTION				