

Specifications:**Material And Finish:**

Insulator:High Temp. Plastic UL94V-0 Color:Black

Contact:Copper Alloy

Shell:Copper Alloy With Nickel Plated

Plated:See Ordering Information

Rating:

Current Rating:1.0 Amp

Voltage Rating:30V AC/DC

Operating Temperature Range:-40~+105°C

Electrical:

Contact resistance:50m Ohm Max







Insulator resistance:1000M ohm min.

Withstanding Voltage:500V AC/Minute


Ordering Information**MUSBF-B5MX-01-X**

1 2 3 4 5 6 7 8

- 1: — Series No.
2: — F:Female
3: — B:B Type
4: — No. of Positions
5: — M:SMT Type
6: — H:Selective Gold Flash
P:Selective Gold 30u"
7: — 01:Code
8: — C:In Tray
D:Tape&Reel

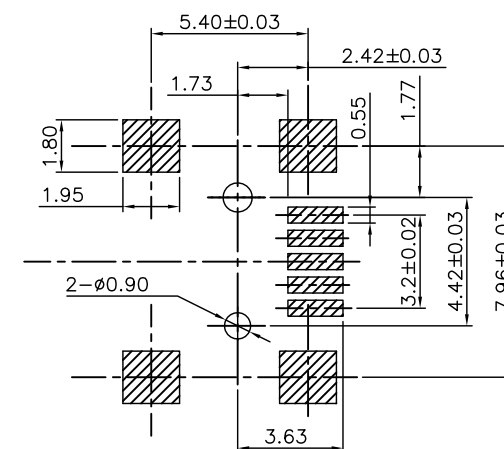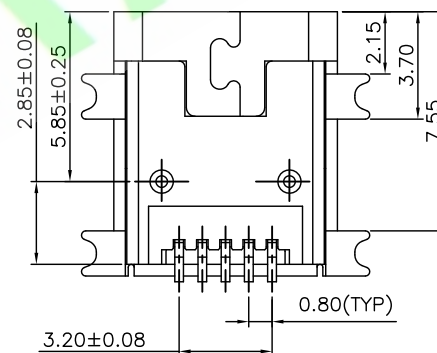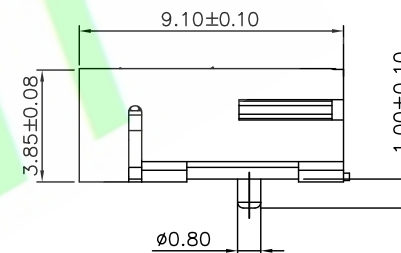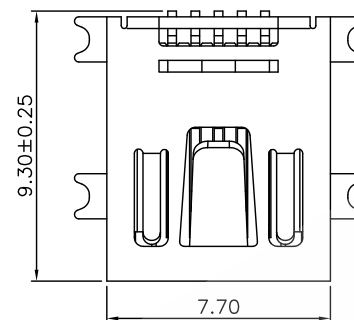

Recommended PCB Layout Tolerance:±0.05

5X				DR.BY.:	GENERAL TOLERANCE:		PART NO : MUSBF-B5MX-01-X	HJBRIGHT⁽¹⁹⁾ 東莞市華晶電子有限公司 BRIGHT-E ELECTRONIC TECHNOLOGY LIMITED		
4X				Samson	LINEAR	ANGLES	DWG. NO.: RD903-021			
3X				CHKD.:	X.: ±0.30	X': ±5.0°	TITLE : Mini USB 5Pin B Type Female SMT Type	SHEET: 1/1		A4
2X				Tony	X.X: ±0.20	X.X': ±3.0°		SCALE: 1:1		
1X	ORIGINAL	Samson		APPD.:	X.XX: ±0.15	X.XX': ±2.0°		DATE: 12-Mar-2009		
REV.	DESCRIPTION	DR.BY	ECN. NO.	Billy	X.XXX: ±0.10	X.XXX': ±1.0°				