

Specifications:**Material And Finish:**

Insulator:Thermoplastics UL94V-0 Color:Black

Contact:Copper Alloy

Shell:Copper Alloy

Plated:See Ordering Information

Rating:

Current Rating:1.0 Amp

Voltage Rating:30V AC/DC

Operating Temperature Range:-40°~+105°C

Electrical:

Contact resistance:50m Ohm Max



Insulator resistance:100M ohm min.

Withstanding Voltage:100V AC/Minute

Ordering Information**MUSBF-B5SX-07-C**

1 2 3 4 5 6

- 1: — Series No.
2: — Female
3: — B Type&5P
4: — Straight Type
5: — H:Selective Gold Flash
J:Selective Gold 3u"
K:Selective Gold 5u"
L:Selective Gold 10u"
M:Selective Gold 15u"
P:Selective Gold 30u"
6: — C:In Tray

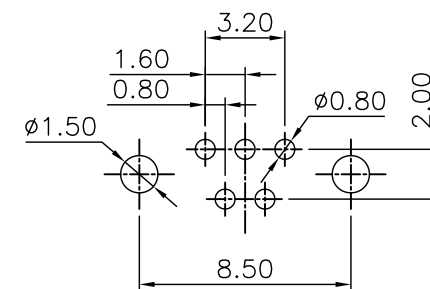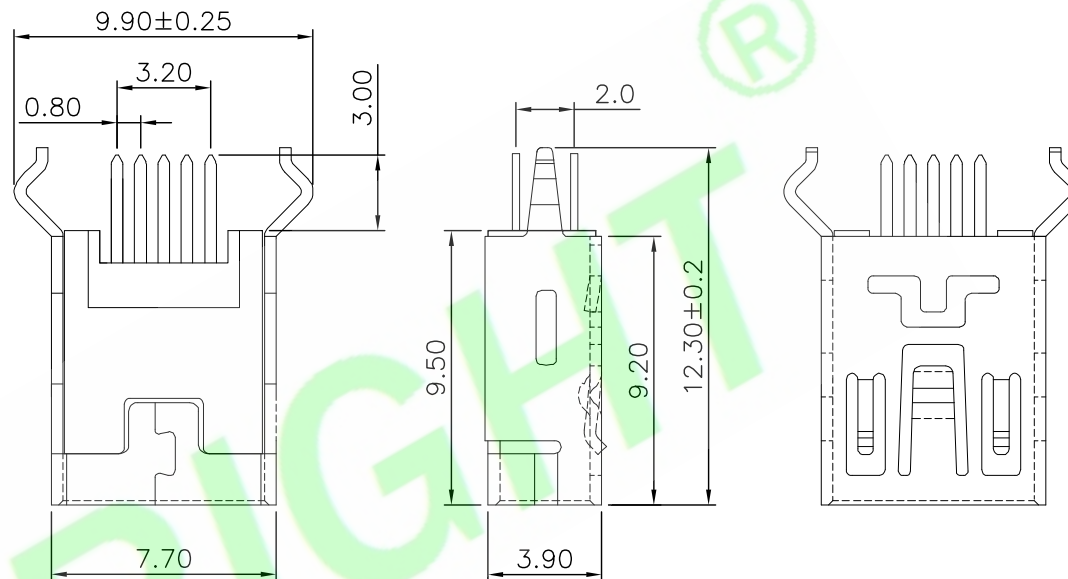

Recommended PCB Layout(Tolerance::0.05mm)

5X				DR.BY.: Kenry	GENERAL TOLERANCE:		PART NO : MUSBF-B5SX-07-C	HJBRIGHT 東莞市華晶電子有限公司 BRIGHT-E ELECTRONIC TECHNOLOGY LIMITED		
4X					LINEAR	ANGLES				
3X				CHKD.: Tony	X.: ±0.35	X': ±5.0°	TITLE : Mini USB 5P Female B Type Straight Type	SHEET: 1/1		A4
2X					X.X: ±0.25	X.X': ±3.0°		SCALE: 1:1		
1X	ORIGINAL	Kenry		APPD.: Biily	X.XX: ±0.15	X.XX': ±2.0°		DATE: 6-May-2015		
REV.	DESCRIPTION	DR.BY	ECN. NO.		X.XXX: ±0.10	X.XXX': ±1.0°				