

Specifications:

Material And Finish:

Insulator:PBT UL94V-2

Contact:Phosphor Bronze

Shell:Brass With Nickel Plated

Plated:See Ordering Information

Rating:

Current Rating:1.5 Amp

Operating Temperature Range:-50°~+85°C

Electrical:

Contact resistance:30m Ohm Max

Insulator resistance:1000M ohm min.

Withstanding Voltage:500V AC/Minute

Mechanical:

Mating Force:3.5Kg.Max

Unmating Force:1Kg.Min

Durability:1500 Cycles

Ordering Information

USBF-BRA-02-XC

1 2 3 4 5

1: — Series No.

2: — BR:B Type&R/A Type





3: — A:Gold Flash


4: — Color:

W:White

B:Black

5: — C:In Tray

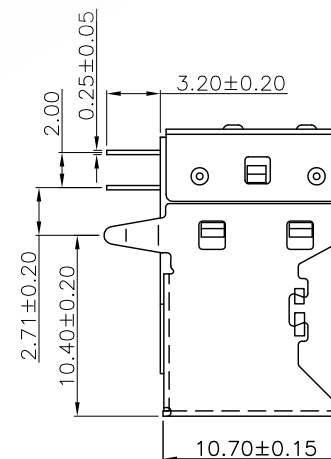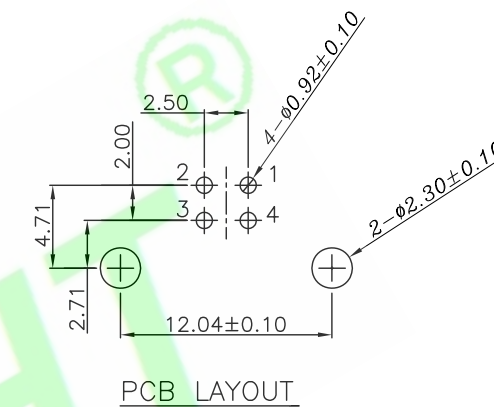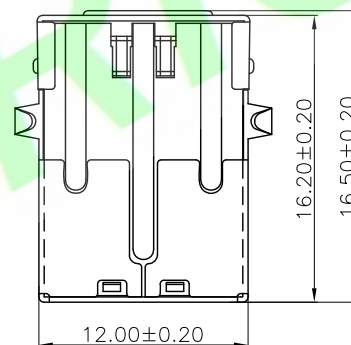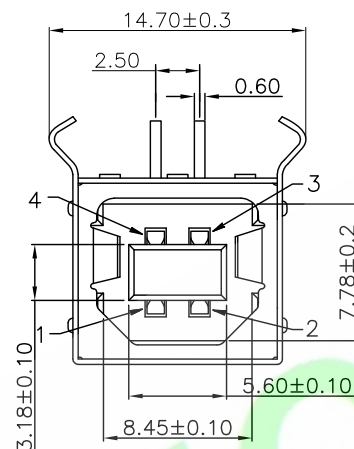

5X				DR.BY.: Aaron	GENERAL TOLERANCE:		PART NO : USBF-BRA-02-XC	HJBRIGHT® 東莞市華晶電子有限公司 BRIGHT-E ELECTRONIC TECHNOLOGY LIMITED	
4X				CHKD.: Tony	LINEAR	ANGLES	DWG. NO.: USBF-TS007		
3X				APPD.: Billy	X.: ±0.30	X': ±5.0°	TITLE : USB BF 90插板有后盖 TYPE	SHEET: 1/1	 THIRD ANGLE PROJECTION
2X					X.X: ±0.25	X.X': ±3.0°	DATE: 23-May-2017	SCALE: 1:1	
1X	ORIGINAL	Aaron			X.XX: ±0.15	X.XX': ±2.0°		UNIT: mm	
REV.	DESCRIPTION	DR.BY	ECN. NO.		X.XXX: ±0.10	X.XXX': ±1.0°			A4