

Specifications:**Material And Finish:**

Insulator:High Temperature Resistant Thermoplastic
UL94V-0 Color:white

Contact:Copper alloy
Plated:Tin Over Nickel Plated

Rating:

Current Rating:3.0A
Voltage Rating:250V AC/DC
Operating Temperature Range:-40°~+105°C




Electrical:

Contact resistance:20m Ohm Max
Insulator resistance:1000M ohm min.
Withstanding Voltage:2000V AC/Minute


Ordering Information**SMD2052-XX**


1 2

1: — Series No.
2: — No. of Positions

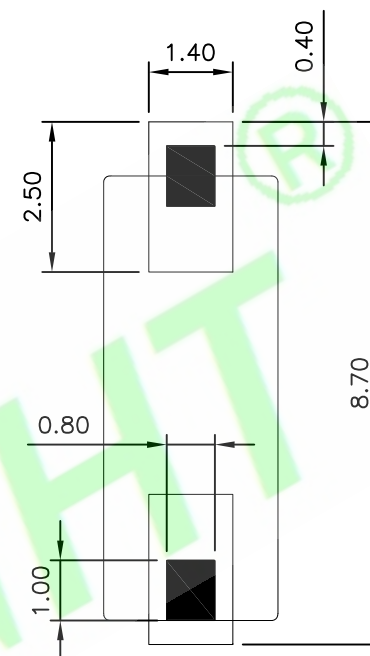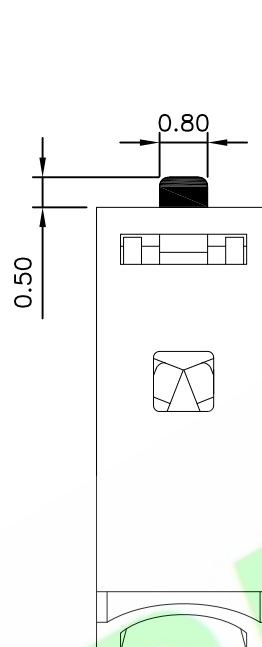

Recommended PCB Layout

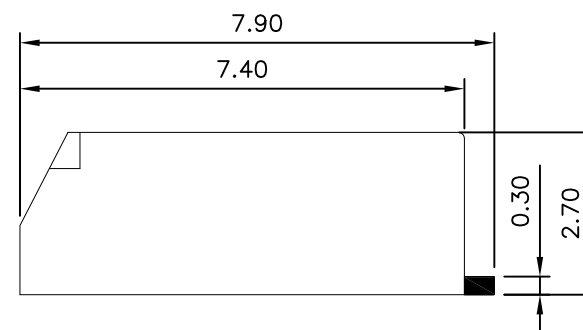

5X				DR.BY.: Kenry	GENERAL TOLERANCE:		PART NO : SMD2052-XX	HJBRIGHT® 东莞市華晶電子有限公司 BRIGHT-E ELECTRONIC TECHNOLOGY LIMITED		
4X						LINEAR	ANGLES			
3X				CHKD.: Tony	x.: ±0.30	x°: ±5.0°	TITLE : SMD Terminal Blocks			
2X	旧款暂停生产, 依新款修改图纸	Aaron	20171025		x.x: ±0.20	x.x°: ±3.0°				
1X	ORIGINAL	Kenry		APPD.: Billy	x.xx: ±0.15	x.xx°: ±2.0°		SHEET: 1/1		A4
REV.	DESCRIPTION	DR.BY	ECN. NO.		x.xxx: ±0.10	x.xxx°: ±1.0°	DATE: 6-Jan-2015	SCALE: 1:1		
								UNIT: mm	THIRD ANGLE PROJECTION	