

RoHS Compliant

Specifications:**Material And Finish:**

Insulator:PBT UL94V-0
Contact:Phosphor Bronze
Plated:See Ordering Information

Rating:

Current Rating:3.0 Amp
Voltage Rating:250V AC/DC
Operating Temperature Range:-40°~+105°C



Electrical:


Contact resistance:20m Ohm Max
Insulator resistance:1000M ohm min.
Withstanding Voltage:500V AC/Minute

Ordering Information**M2541-65X-XA**

1 2 3 4 5

- 1:— Series No.
2:— Height
3:— A:Gold Flash
B:Gold 3u”
Q:Tin Plated
4:— B:Black
W:White
U:Blue
R:Red
Y:Yellow
5:— A:In bag

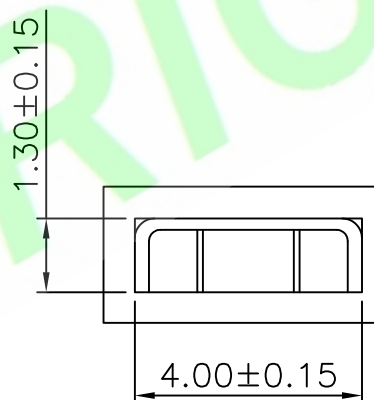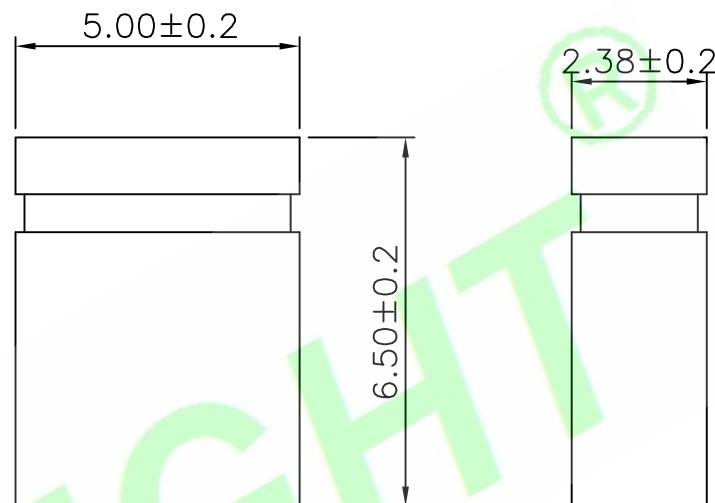

5X				DR.BY.: Samson	GENERAL TOLERANCE:		PART NO : M2541-65X-XA	HJBRIGHT[®] 東莞市華晶電子有限公司 BRIGHT-E ELECTRONIC TECHNOLOGY LIMITED		
4X					LINEAR	ANGLES	DWG. NO.: RD0809-009			
3X				CHKD.: Tony	x.: ±0.30	x': ±5.0°	TITLE : 2.54mm Pitch Mini Jumper Close Type H:6.5MM	SHEET: 1/1		A4
2X					x.x: ±0.20	x.x': ±3.0°		SCALE: 1:1		
1X	ORIGINAL	Samson		APPD.: Billy	x.xx: ±0.15	x.xx': ±2.0°		DATE: 09-Sep-2008		
REV.	DESCRIPTION	DR.BY	ECN. NO.		x.xxx: ±0.10	x.xxx': ±1.0°				