

Specifications:**Material And Finish:**

Insulator:Glass-Filled Polyester, Color:Nature

Contact:Phosphor Bronze

Plated:See Ordering Information

Rating:

Current Rating:1.5 Amp

Rated Voltage: 500V r.m.s contact to contact

Operating Temperature Range:-55° ~+125° C

Electrical:

Contact resistance:20m Ohm Max

Insulator resistance:1000M ohm min.

Voltage proof: 750V r.m.s contact to contact

Ordering Information**P2007S-154Y-01-X**

1 2 3 4 5

1:—Series No.

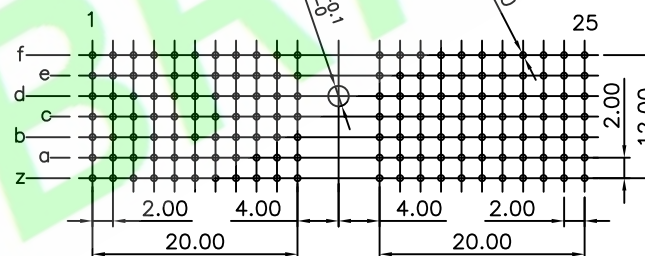
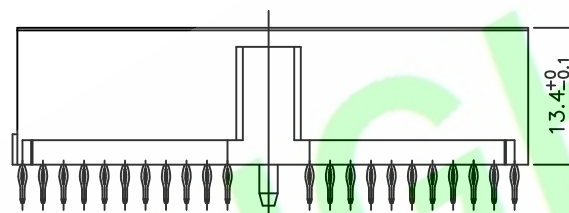
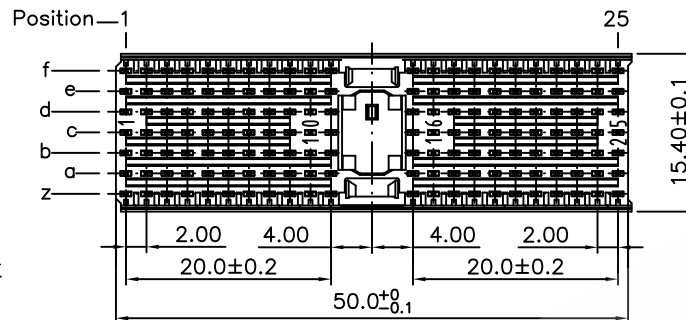
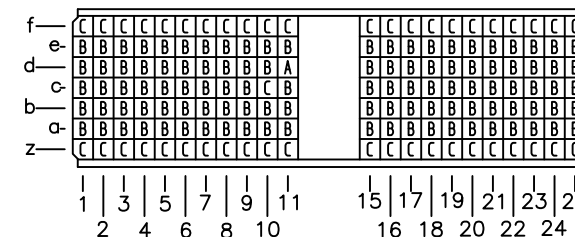

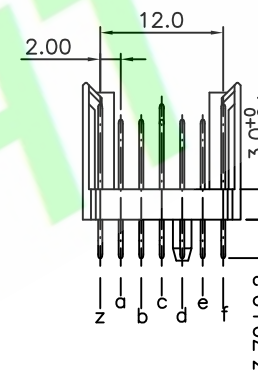
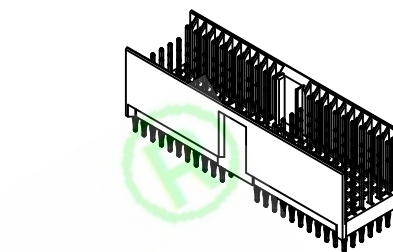
2:—S:Staright type

3:—No. of Positions

4:—Y:30u"Gold on Contact; Tin on tail

5:—B:In Tube

C:In Tray

Recommended PCB Layout
(Tolerance:0.05mm)

Contact Layout

5X				DR.BY.: Samson	GENERAL TOLERANCE:		PART NO : P2007S-154Y-01-X	HJBRIGHT® 東莞市華晶電子有限公司 BRIGHT-E ELECTRONIC TECHNOLOGY LIMITED	
4X				CHKD.: Tony	LINEAR	ANGLES	DWG. NO.:		
3X				APPD.: Billy	x.: ±0.30	x': ±5.0°	TITLE :	SHEET: 1/1	THIRD ANGLE PROJECTION
2X					x.x: ±0.20	x.x': ±3.0°	2mm Har-bus HM male connector TYPE A	SCALE: 1:1	
1X	ORIGINAL	Samson			x.xx: ±0.15	x.xx': ±2.0°	154 Pol., termination length 3.7mm	UNIT: mm	
REV.	DESCRIPTION	DR.BY	ECN. NO		x.xxx: ±0.10	x.xxx': ±1.0°	DATE: 11-Oct-2017		A4