

Specifications:

Material And Finish:

Insulator:LCP UL94V-0 Color: BLACK

Contact:Phosphor Bronze

Fixed Shell:Phosphor Bronze

Rating:

Conductor current Rating:Single Pin 1.0 Amp Min.

High Frequency:50MHZ

Operating Temperature Range:-25°C~+105°C

Lead-free reflow welding temperature:260°C

Electrical:

Insulator resistance:20M ohm min.

Withstanding Voltage:250V AC/Minute

Mechanical:

Mate/Unmate cycles:More than 5000Times

Distortion Mate/Unmate cycles:More than 2000Times

Distortion Angle:≥7°

Ordering Information

A1270H-26H-141-X

1 2 3 4 5 6

1:—Series No.

2:—H:SMT Type








3:—No. of Positions

4:—H:Contact Plated Gold 30u",
other Plated Matte Tin

5:—141:Plastic High=14.1mm

6:—B:In Tube

E:Tape&Reel

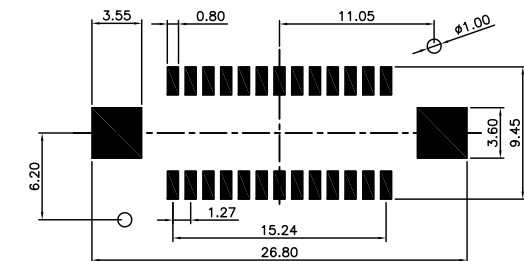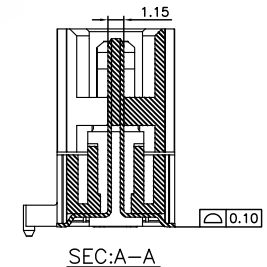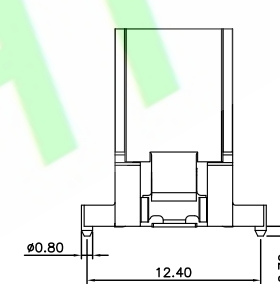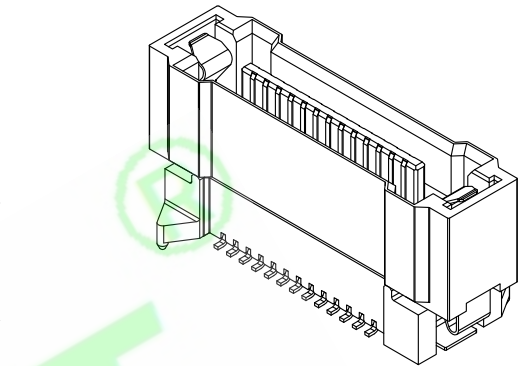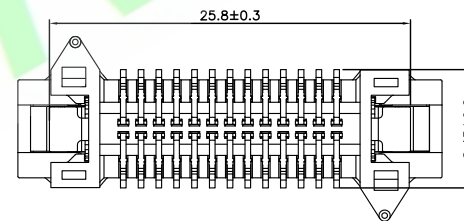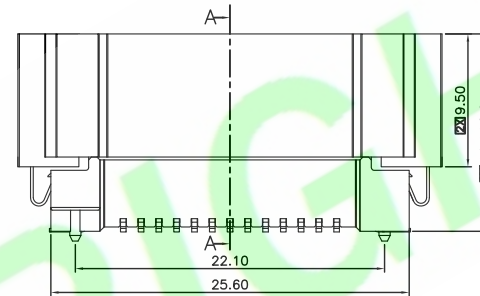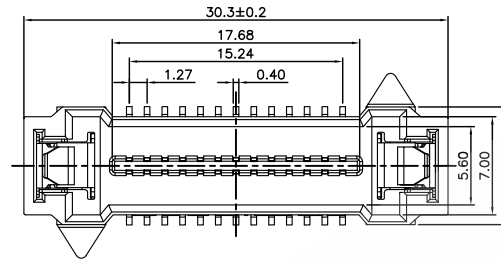

PCB LAYOUT

5X				DR.BY.: Samson	GENERAL TOLERANCE:		PART NO : A1270H-26H-141-X	HJBRIGHT 東莞市華晶電子有限公司 BRIGHT-E ELECTRONIC TECHNOLOGY LIMITED		
4X					LINEAR	ANGLES	DWG. NO.:			
3X				CHKD.:	x.: ±0.30	x': ±5.0°	TITLE : 1.27mm Pitch male socket Horizontal SMT Type(H=14.1mm)	SHEET: 1/1		A4
2X	變更厚度及高度	Samson	20141218	Tony	x.x: ±0.20	x.x': ±3.0°		SCALE: 1:1		
1X	ORIGINAL	Samson		APPD.:	x.xx: ±0.15	x.xx': ±2.0°	UNIT: mm	THIRD ANGLE PROJECTION		
REV.	DESCRIPTION	DR.BY	ECN. NO.	Billy	x.xxx: ±0.10	x.xxx': ±1.0°	DATE: 11-Jun-2014			