






Fixed Shell:Phosphor Bronze

Lead-free reflow welding temperature:260°C


Withstanding Voltage:250V AC/Minute

Distortion Angle: $\geq 7^\circ$
$$\overline{1} \quad \overline{2} \quad \overline{3} \quad \overline{4} \quad \overline{5} \quad \overline{6}$$


- 1:— Series No.
2:— H:SMT Type
3:— No. of Positions
4:— H:Contact Plated Gold 30u”,
other Plated Matte Tin
5:— 198:Plastic High=19.8mm
6:— B:In Tube
E:Tape&Reel

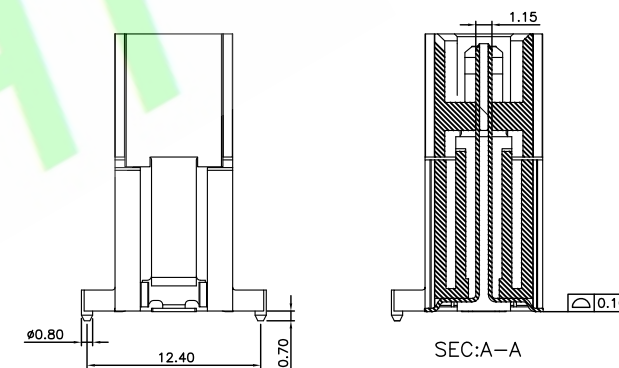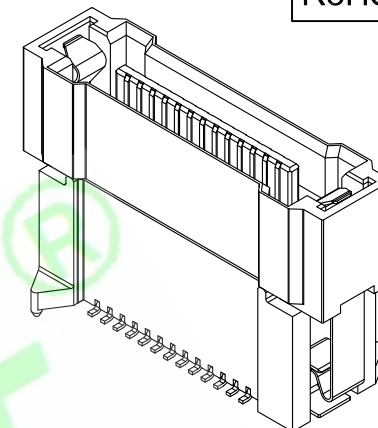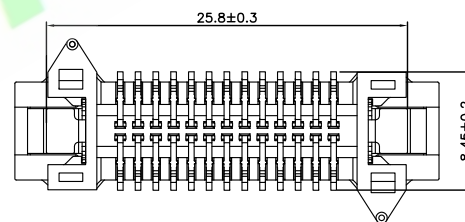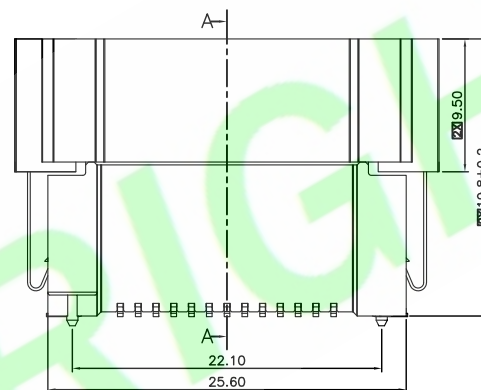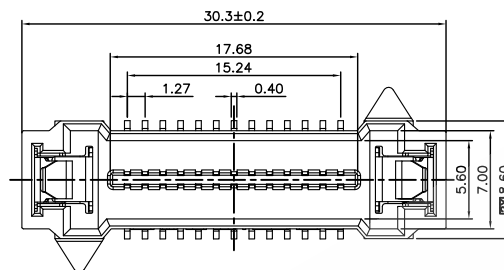

SEC:A-A

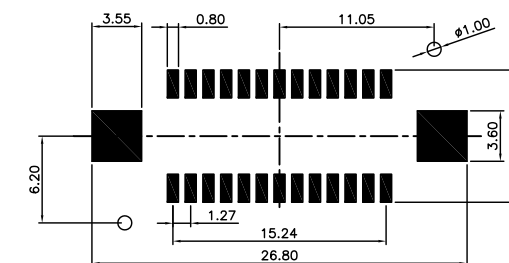

PCB LAYOUT


5X				DR.BY.:	GENERAL TOLERANCE:		PART NO : A1270H-26H-198-X	HJBRIGHT [®] 東莞市華晶電子有限公司 BRIGHT-E ELECTRONIC TECHNOLOGY LIMITED		
4X				Samson	LINEAR	ANGLES	DWG. NO.:			
3X				CHKD.:	x.: ±0.30	x': ±5.0°	TITLE : 1.27mm Pitch male socket Horizontal SMT Type(H=19.8mm)	SHEET: 1/1		A4
2X	變更厚度及高度	Samson	20141218	Tony	x.x: ±0.20	x.x': ±3.0°		SCALE: 1:1		
1X	ORIGINAL	Samson		APPD.:	x.xx: ±0.15	x.xx': ±2.0°				
REV.	DESCRIPTION	DR.BY	ECN. NO.	Billy	x.xxx: ±0.10	x.xxx': ±1.0°	DATE: 11-Jun-2014	UNIT: mm		

HJBRIGHT 東莞市華晶電子有限公司
BRIGHT-E ELECTRONIC TECHNOLOGY LIMITED

SHEET: 1/1

SCALE: 1:1

UNIT: mm



THIRD ANGLE PROJECTION

A4