

Specifications:

Material And Finish:

Insulator:LCP UL94V-0 Color: BLACK

Contact:Phosphor Bronze

Fixed Shell:Phosphor Bronze

Rating:

Conductor current Rating:Single Pin 1.0 Amp Min.

High Frequency:50MHZ

Operating Temperature Range:-25°C~+105°C

Lead-free reflow welding temperature:260°C

Electrical:

Insulator resistance:20M ohm min.

Withstanding Voltage:250V AC/Minute

Mechanical:

Mate/Unmate cycles:More than 5000Times







Distortion Mate/Unmate cycles:More than 2000Times

Distortion Angle:≥7°


Ordering Information

A1270H-26H-194-X
1 2 3 4 5 6

- 1: — Series No.
2: — H:SMT Type
3: — No. of Positions
4: — H:Contact Plated Gold 30u",
other Plated Matte Tin
5: — 194:Plastic High=19.4mm
6: — B:In Tube
E: Tape&Reel

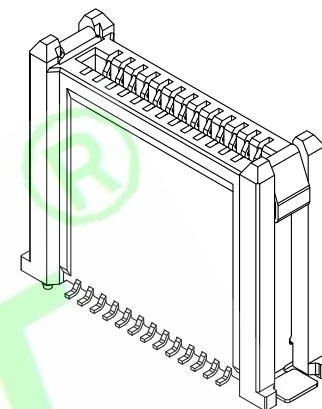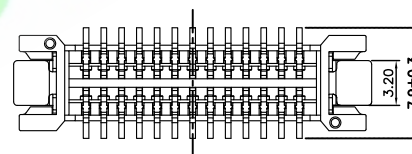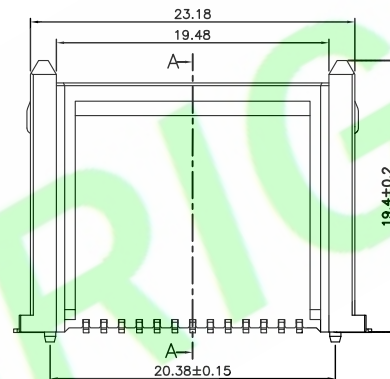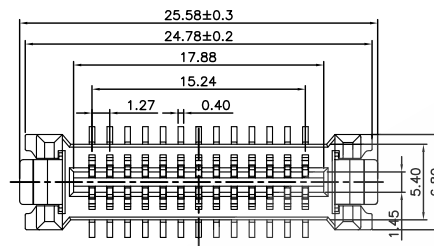

SEC:A-A

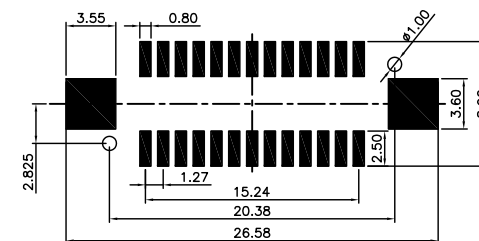

PCB LAYOUT

5X				DR.BY.: Samson	GENERAL TOLERANCE:		PART NO : A1270H-26H-194-X	HJBRIGHT [®] 東莞市華晶電子有限公司 BRIGHT-E ELECTRONIC TECHNOLOGY LIMITED		 THIRD ANGLE PROJECTION	A4
4X					LINEAR	ANGLES	DWG. NO.:				
3X				CHKD.: Tony	x.: ±0.30	x': ±5.0°	TITLE : 1.27mm Pitch Female socket Horizontal SMT Type(H=19.4mm)	SHEET: 1/1			
2X					x.x: ±0.20	x.x': ±3.0°		SCALE: 1:1			
1X	ORIGINAL	Samson		APPD.: Billy	x.xx: ±0.15	x.xx': ±2.0°		UNIT: mm			
REV.	DESCRIPTION	DR.BY	ECN. NO.		x.xxx: ±0.10	x.xxx': ±1.0°	DATE: 11-Jun-2014				