

Specifications:**Material And Finish:**

Insulator:PBT+30% UL94V-0,Black

Contact:Cooper alloy,Gold 3u"

Rating:

Current Rating:1.5 Amp

Voltage Rating:125V AC

Operating Temperature Range:-25°~+90°C

Electrical:





Contact resistance:20m Ohm Max

Insulator resistance:500M ohm min.


Withstanding Voltage:1000V AC/Minute

Mechanical:

Durability:500 Cycles Min

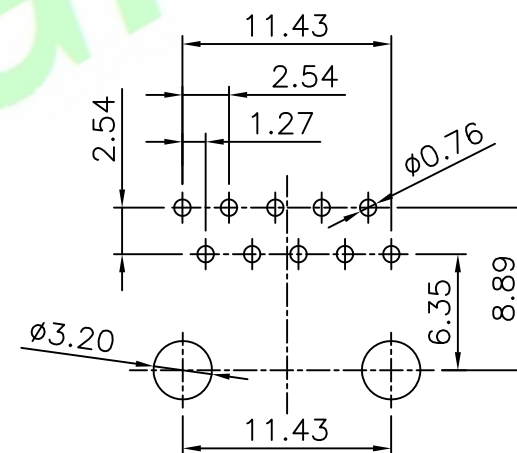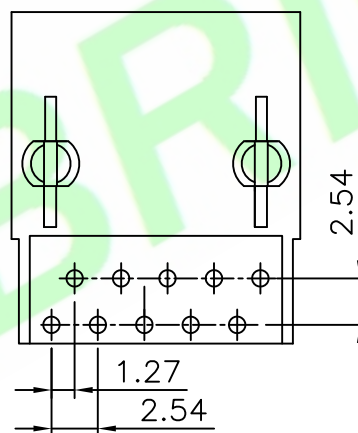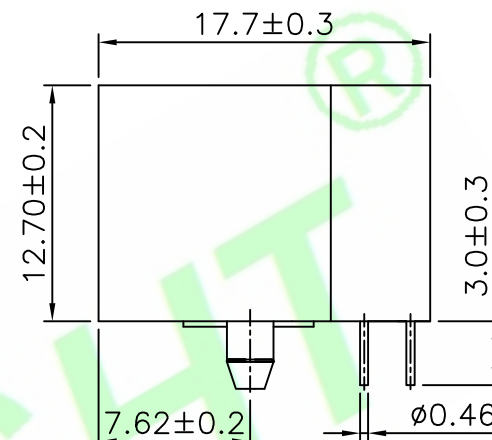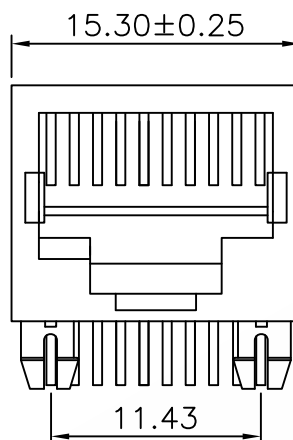

Recommended PCB Layout

5X				DR.BY.: Bruce	GENERAL TOLERANCE:		PART NO : HJ-817-10P10C		HJBRIGHT® 東莞市華晶電子有限公司 BRIGHT-E ELECTRONIC TECHNOLOGY LIMITED		
4X					LINEAR	ANGLES	DWG. NO.:				
3X				CHKD.: Tony	X.: ±	X°: ±5.0°	TITLE :				
2X					X.X: ±0.25	X.X°: ±3.0°	10P10C Modular jack R/A Type				
1X	ORIGINAL	Samson		APPD.: Billy	X.XX: ±0.15	X.XX°: ±2.0°	DATE: 19-Sep-2006		SHEET: 1/1		A4
REV.	DESCRIPTION	DR.BY	ECN. NO.		X.XXX: ±0.10	X.XXX°: ±1.0°			SCALE: 1:1		
							UNIT: mm		THIRD ANGLE PROJECTION		