

Specifications:**Material And Finish:**

Insulator:Nylon66 UL94V-0

Contact:Brass

Plated:See Ordering Information

Rating:

Current Rating:13A(2~4P),11A(6~10P)

Voltage Rating:600V AC/DC

Operating Temperature Range:-55°~+105°C

Electrical:

Contact resistance:20m Ohm Max

Insulator resistance:1000M ohm min.

Withstanding Voltage:5000V AC/Minute

Ordering Informat**HJ63501WR-XX-05-X**

1	2	3	4
1	2	3	4

1: — Series No.

2: — R/R/A Type

3: — No. of Positions






4: — Plated code:

A:Gold Flash

M:Matte Tin plated

Q:Tin Plated


Z:Gold 2u"

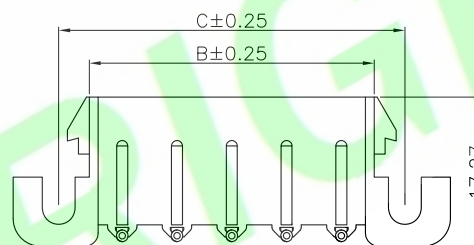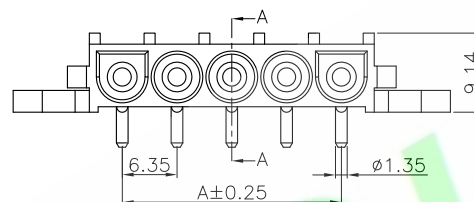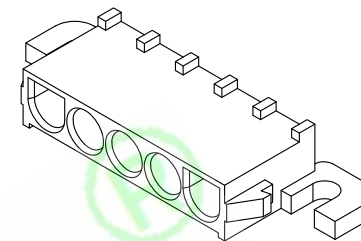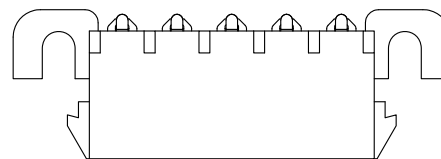


Section:A-A

Ordering Information & Dimension:

Circuits	Dimensions		
	A	B	C
2	6.35	13.97	21.08
3	12.70	20.32	27.43
4	19.05	26.67	33.78
5	25.40	33.02	40.13
6	31.75	39.37	46.48
7	38.10	45.72	52.83
8	44.45	52.07	59.18
9	50.80	58.42	65.53
10	57.15	64.77	71.88

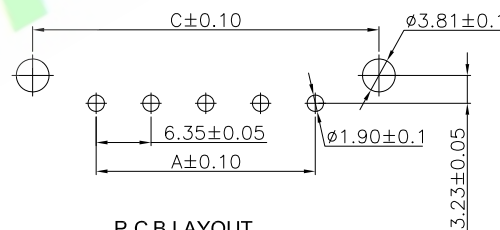

P.C.B LAYOUT

5X				DR.BY.: Aaron	GENERAL TOLERANCE:		PART NO : HJ63501WR-XX-05-X		HJBRIGHT® 東莞市華晶電子有限公司 BRIGHT-E ELECTRONIC TECHNOLOGY LIMITED			
4X					LINEAR	ANGLES	DWG. NO.:					
3X				CHKD.: Tony	x.: ±0.30	x': ±5.0°	TITLE : 6.35mm Pitch Wafer R/A Type		SHEET: 1/1			A4
2X	增加电镀代码Q	Bruce	2018.07.14		x.x: ±0.20	x.x': ±3.0°			SCALE: 1:1			
1X	ORIGINAL	Aaron		APPD.: Billy	x.xx: ±0.15	x.xx': ±2.0°	DATE: 29-May-2018		UNIT: mm			
REV.	DESCRIPTION	DR.BY	ECN. NO.		x.xxx: ±0.10	x.xxx': ±1.0°						