

Specifications:**Rating:**

Current Rating:1.0 Amp

Voltage Rating:250V AC/DC

Operating Temperature Range:-40°~+105°C

Electrical:

Contact resistance:20m Ohm Max

Insulator resistance:100M ohm min.

Withstanding Voltage:500V AC/Minute

Ordering Information

CS1272-XXX-02-PX

1 2 3 4 5

1: — Series No.








2: — No. of Positions

3: — A:Gold Flash

4: — P:PBT

5: — C:In Tray

NUMBER OF POSITIONS	DIMENSION		
	A	B	C
06	2.54	8.00	11.80
08	3.81	9.27	13.07
10	5.08	10.54	14.34
12	6.35	11.81	15.61
14	7.62	13.08	16.88
16	8.89	14.35	18.15
20	11.43	16.89	20.69
24	13.97	19.43	23.23
26	15.24	20.70	24.50
30	17.78	23.24	27.04
34	20.32	25.78	29.58
40	24.13	29.59	33.39
44	26.67	32.13	35.93
50	30.48	35.94	39.74
60	36.83	42.29	46.09
64	39.37	44.83	48.63
66	40.64	46.10	49.90
68	41.91	47.37	51.17
70	43.18	48.64	52.44
74	45.72	51.18	54.98
76	46.99	52.45	56.25
80	49.53	54.99	58.79

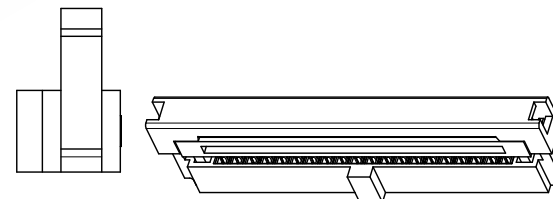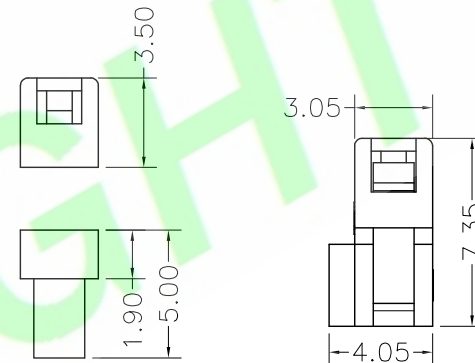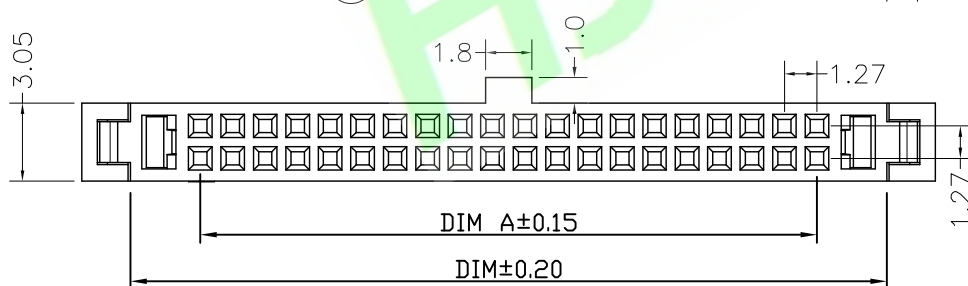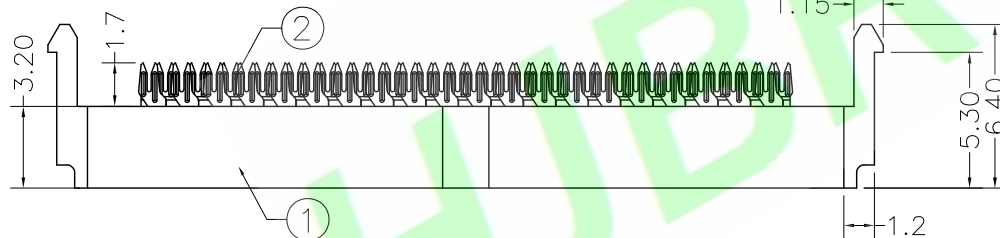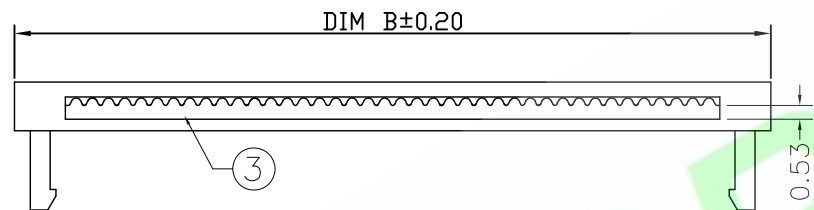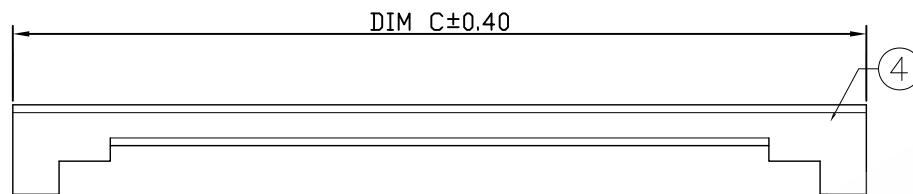

UNLESS TOLERANCE		DRAW BY	Samson	HJBRIGHT 东莞市華晶電子有限公司 BRIGHT-E ELECTRONIC TECHNOLOGY LIMITED	
GENERAL	ANGLE	DESIGN BY	Samson		
X. ± 0.30	X." ± 3.0°	CHECK BY	Tony	ITEM : IDC SOCKET 1.27*1.27 (三件式)	
.X ± 0.20	.X" ± 2.0°	APPROVE BY	Billy		
.XX ± 0.15	.XX" ± 1.0°	SCALE	SHEET	UNIT	DRW NO: REV: C
.XXX ± 0.08	.XXX" ± 0.5°	1:1	1/1	MM	
					