

Specifications:

Material And Finish:

Insulator:PA6T UL94V-0 Color:Black

Contact:Phosphor Bronze

Plated:See Ordering Information

Rating:

Current Rating:3.0 Amp

Voltage Rating:250V AC/DC

Operating Temperature Range:-40°~+105°C

Electrical:

Contact resistance:20m Ohm Max

Insulator resistance:1000M ohm min.

Withstanding Voltage:500V AC/Minute

Ordering Information

S25611S-XXX89-X

1 2 3 4 5

- 1:— Series No.
2:— S:Straight Type
3:— No. of Positions
4:— A:Gold Flash

D:10u"Gold on Contact;Gold Flash on tail

F:20u"Gold on Contact;Gold Flash on tail

H:Contact Area:Gold Plated;Solder tail: Tin Plated.






P:Contact Area:Gold 30u";Solder tail: Tin Plated.

T:10u"Gold on Contact;Matte Tin on tail

Y:30u"Gold on Contact;Matte Tin on tail.

S:Matte Tin Plated

- 5:— A:In bag
B:In Tube
C:In Tray

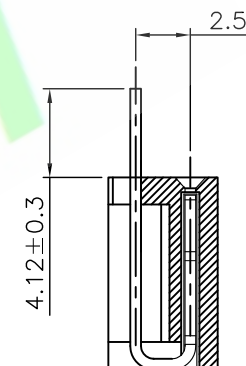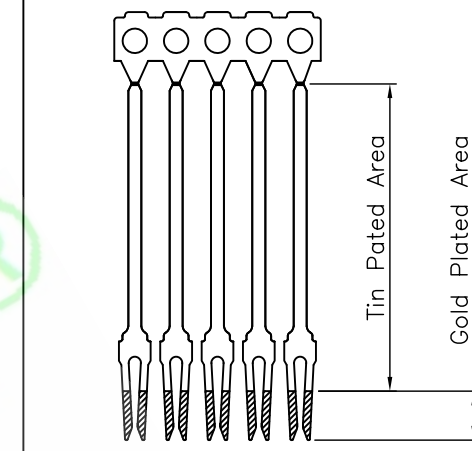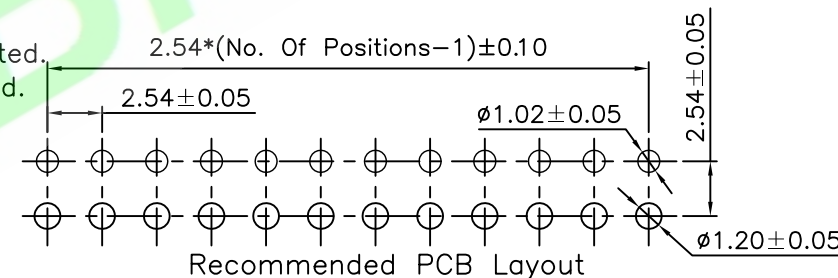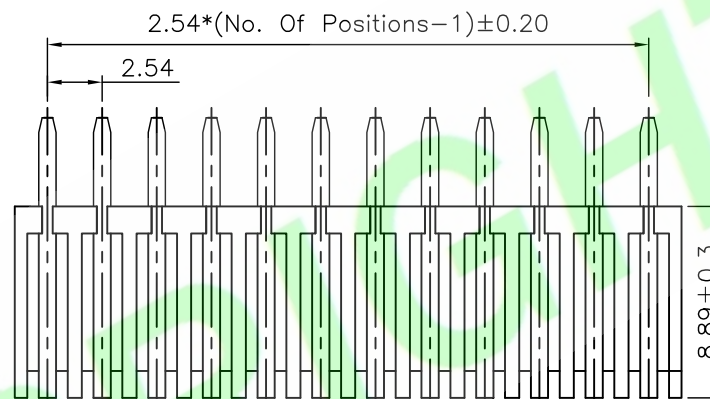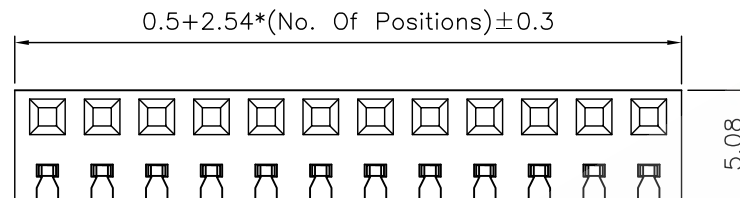

RoHS Compliant

5X				DR.BY:	GENERAL TOLERANCE:		PART NO : S25611S-XXX89-X		HJBRIGHT[®] 東莞市華晶電子有限公司 BRIGHT-E ELECTRONIC TECHNOLOGY LIMITED				
4X				Samson	LINEAR	ANGLES	DWG. NO.: RD0806-121						
3X				CHKD.:	x.: ±0.30	x': ±5.0°	TITLE : 2.54mm Pitch PCB Socket Header Straight Type Bottom Entry						
2X	修正尺寸	Samson	20150323	Tony	x.x: ±0.20	x.x': ±3.0°							
1X	ORIGINAL	joy chen		APPD.:	x.xx: ±0.15	x.xx': ±2.0°	SHEET: 1/1						A4
							SCALE:1:1						
REV.	DESCRIPTION	DR.BY	ECN. NO.	Billy	x.xxx: ±0.10	x.xxx': ±1.0°	DATE: 28-Jun-2008					UNIT:mm	
THIRD ANGLE PROJECTION													

SHEET: 1/1

SCALE:1:1

UNIT:mm



THIRD ANGLE PROJECTION

A4