

Specifications:

Material And Finish:

Insulator:PBT UL94V-0 Color: White

Contact:Brass

Rating:

Current Rating:3.0 Amp



Operating Temperature Range:-40°C~+105°C

Electrical:

Contact resistance:20m Ohm Max

Insulator resistance:1000M ohm min.

Withstanding Voltage:1000V AC/Minute


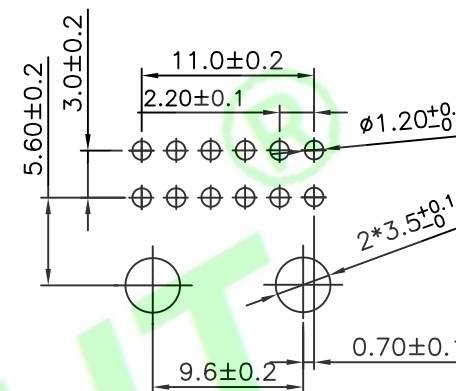
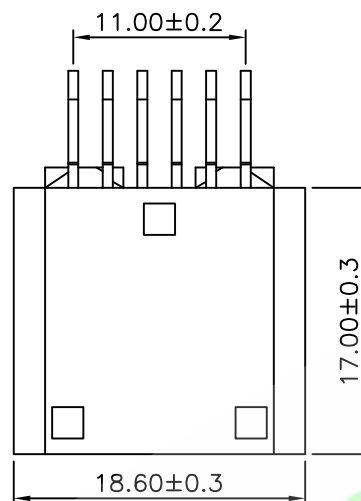


Recommended PCB Layout

Ordering Information

A2202R-12Q-02-X				
1	2	3	4	5

- 1: — Series No.
 2: — R:R/A Type
 3: — No. of Positions
 4: — Q: Tin Plated
 5: — B: In Tube
 C: In Tray

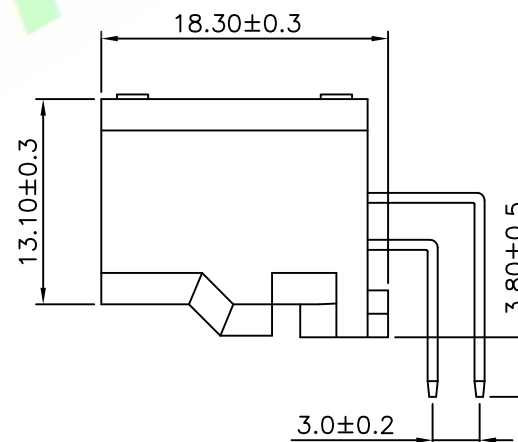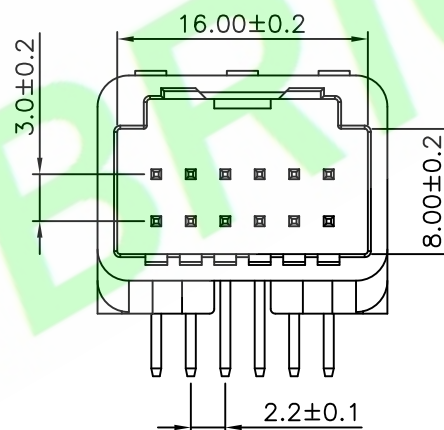

5X			
4X			
3X			
2X			
1X	ORIGINAL	Bruce	
REV.	DESCRIPTION	DR.BY	ECN. NO.

DR.BY:	Bruce
CHKD.:	Tony
APPD.:	Billy

GENERAL TOLERANCE:	
LINEAR	ANGLES
X.: ±0.15	X': ±3.0°
X.X: ±0.10	X.X': ±2.0°
X.XX: ±0.05	X.XX': ±1.0°
X.XXX: ±0.02	X.XXX': ±0.5°

PART NO : A2202R-12Q-02-X
DWG. NO.: 22011-12AW-1
TITLE : CN11 Series PCB Header (H-Type)
DATE: 1-Aug-2018

HJBRIGHT ® 東莞市華晶電子有限公司 BRIGHT-E ELECTRONIC TECHNOLOGY LIMITED	
SHEET: 1/1	 THIRD ANGLE PROJECTION
SCALE: 1:1	
UNIT: mm	

A4