

Insulator:LCP UL94V-0 Color:Black
Contact:Phosphor Bronze
Plated:See Ordering Information



Current Rating:2.0 Amp
Voltage Rating:150V AC/DC
Operating Temperature Range:-40°~+105°C

Contact resistance:20m Ohm Max
Insulator resistance:1000M ohm min.
Withstanding Voltage:500V AC/Minute

S20242M-XXX63-C0X

$$\overline{1} \quad \overline{2} \quad \overline{3} \quad \overline{4} \quad \overline{5}$$

- 1:— Series No.
2:— M:SMT Type
3:— No. of Positions
4:— A:Gold Flash
H:Selective flash Gold
T:10U”Gold contact;Matte Tin on tail 2X
Q:Tin Plated.
5:— B:W/O Cap In Tube
C:In Tray
D:W/Cap In Tube
F:W/Cap In Tape&Reel

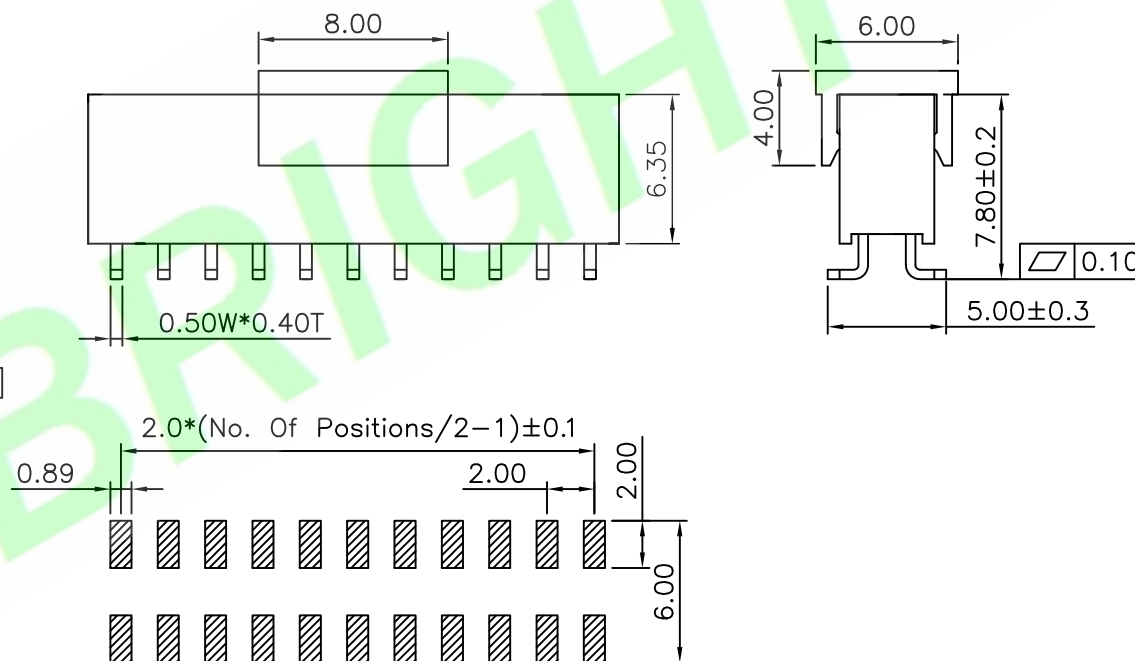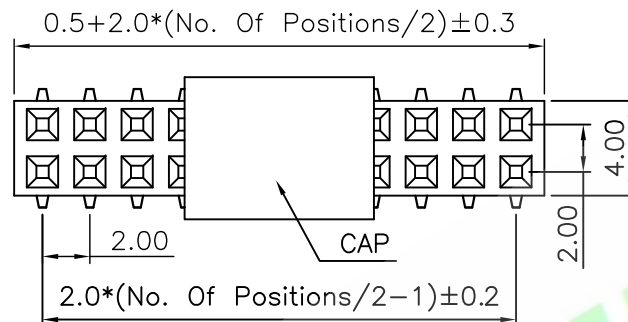

Recommended PCB Layout

5X			DR.BY.:	GENERAL TOLERANCE:		PART NO : S20242M-XXX63-C0X		HJBRIGHT [®] 東莞市華晶電子有限公司 BRIGHT-E ELECTRONIC TECHNOLOGY LIMITED			
4X			Samson	LINEAR	ANGLES	DWG. NO.:					
3X			CHKD.:	x.: ±0.30	x': ±5.0"	TITLE : 2.0mm Pitch PCB Socket Header SMT Type					
2X	增加电镀代码	Judyyan	20181026	Tony	x.x: ±0.25	x.x': ±3.0"	DATE: 6-Mar-2015		SHEET: 1/1	 THIRD ANGLE PROJECTION	A4
1X	ORIGINAL	Samson	APPD.:	x.xx: ±0.15	x.xx': ±2.0"			SCALE: 1:1			
REV.	DESCRIPTION	DR.BY	ECN. NO.	Billy	x.xxx: ±0.10	x.xxx': ±1.0"	UNIT: mm				