

Specifications:**Material And Finish:**

Insulator:PA6T UL94V-0 Color:Black

Contact:Phosphor Bronze

Plated:See Ordering Information

Rating:

Current Rating:3.0 Amp

Voltage Rating:250V AC/DC

Operating Temperature Range:-40~+105°C

Electrical:

Contact resistance:20m Ohm Max

Insulator resistance:1000M ohm min.

Withstanding Voltage:500V AC/Minute

Ordering Information

S25652S-XXX51-NX

1 2 3 4 5

1:— Series No.

2:— S:Straight Type

3:— No. of Positions

4:— A:Gold Flash

D:10u" Gold on Contact;Gold Flash on tail

F:20u" Gold on Contact;Gold Flash on tail

H:Gold Flash on Contact;Matte Tin on tail

Q:Tin Plated

Y:30u" Gold on contact; Matte Tin on tail





S:Matte Tin Plated

5:— A:In bag


B:In Tube

C:In Tray

F:W/Cap In Tape&Reel

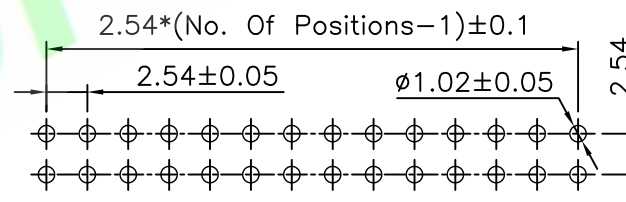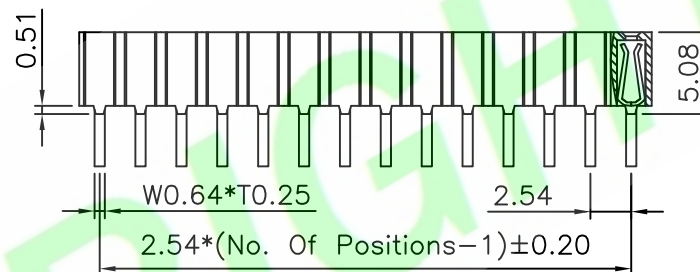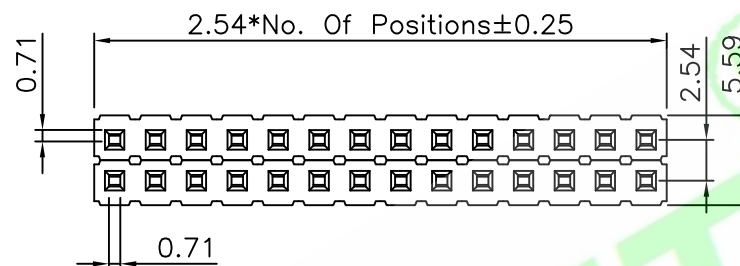

Recommended PCB Layout

5X				DR.BY.: Kenry	GENERAL TOLERANCE:		PART NO : S25652S-XXX51-NX		HJBRIGHT® 東莞市華晶電子有限公司 BRIGHT-E ELECTRONIC TECHNOLOGY LIMITED			
4X					LINEAR	ANGLES	DWG. NO.:					
3X				CHKD.: Tony	x.: ±0.30	x': ±5.0°	TITLE : 2.54mm Pitch PCB Socket Header Straight Type		SHEET: 1/1		A4	
2X					x.x: ±0.20	x.x': ±3.0°			SCALE: 1:1			
1X	ORIGINAL	Kenry		APPD.:	x.xx: ±0.15	x.xx': ±2.0°	DATE: 16-May-2016		UNIT: mm			THIRD ANGLE PROJECTION
REV.	DESCRIPTION	DR.BY	ECN. NO.	Billy	x.xxx: ±0.10	x.xxx': ±1.0°						