

Specifications:**Material And Finish:**

Insulator:PA6T UL94V-0 Color:Black

Contact:Brass

Rating:

Current Rating:2.0 Amp

Voltage Rating:150V AC/DC

Operating Temperature Range:-55°~+125°C

Electrical:

Contact resistance:20m Ohm Max

Insulator resistance:5000M ohm min.

Withstanding Voltage:500V AC/Minute

Ordering Information**200122M-XXXXXX-NXX**

1 2 3 4 56

1:—Series No.

2:—SMT Type

3:—No. of Positions

4:—A:Gold Flash

H:Contact Plated Gold Flash;

Other area plated matte tin

T:10u" Gold on contact;Matte Tin on tail





Q:Tin Plated

5:—0:W/O Peg

1:W/Peg

6:—E:W/Cap In Tube

F:W/Cap In Tape&Reel

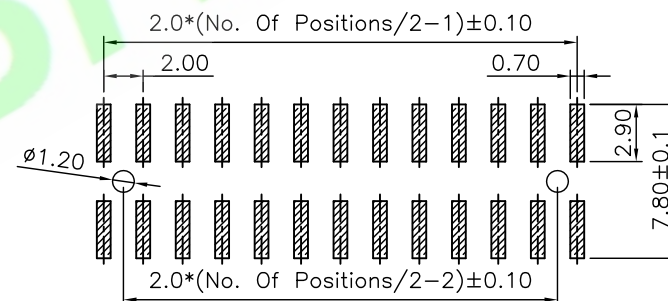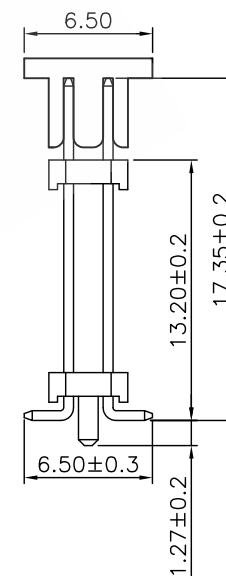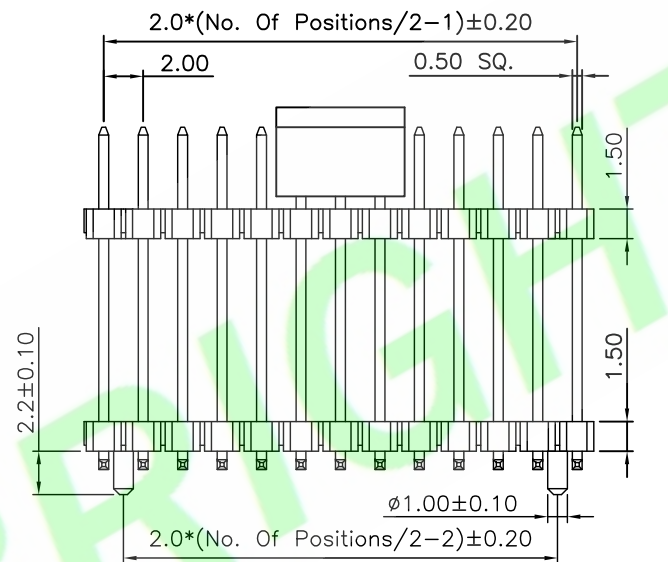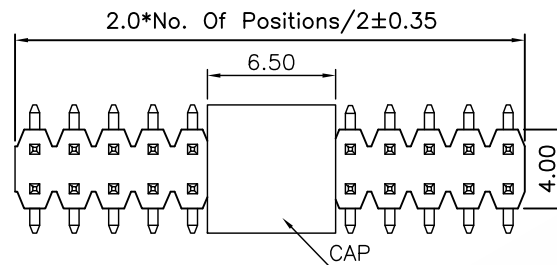

Recommended PCB Layout(Tolerance:±0.05mm)

5X				DR.BY.: Aaron	GENERAL TOLERANCE:		PART NO : 200122M-XXXXXX-NXX		HJBRIGHT [®] 東莞市華晶電子有限公司 BRIGHT-E ELECTRONIC TECHNOLOGY LIMITED					
4X					LINEAR	ANGLES	DWG. NO.:							
3X				CHKD.: Tony	x.: ±0.30	x': ±5.0°	TITLE : 2.0mm Pitch Pin Header SMT Type		SHEET: 1/1			A4		
2X					x.x: ±0.20	x.x': ±3.0°			SCALE: 1:1					
1X	ORIGINAL	Aaron		APPD.:	x.xx: ±0.15	x.xx': ±2.0°	DATE: 23-Jan-2018		UNIT: mm				THIRD ANGLE PROJECTION	
REV.	DESCRIPTION	DR.BY	ECN. NO.	Billy	x.xxx: ±0.10	x.xxx': ±1.0°								