

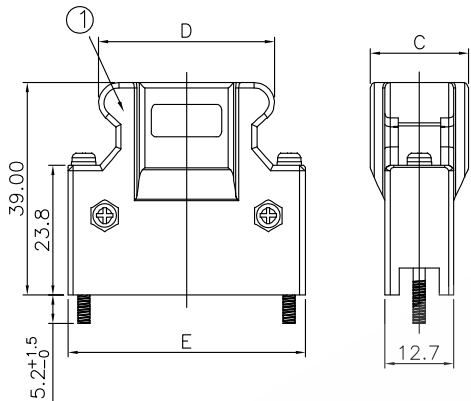


RoHS Compliant

外壳PIN数	DIM A	DIM B	DIM C	DIM D	DIM E
14P	8.50	23.60	12.70	18.20	29.50
20P	12.00	27.40	14.00	22.05	33.35
26P	12.00	31.30	14.00	25.86	37.16
36P	17.00	37.61	18.00	32.21	43.51
50P	17.00	46.50	18.00	41.10	52.40








⑥	SHELL	1	SPCC	
⑤	COVER	PINS	Copper Alloy	
④	HOUSING	1	PBT	UL 94V-0
③	Cover	1	PBT	UL 94V-0
②	Clamp	2	Spcc	
①	Plastic shell	2	ABS	
ITEM	PART NAME	Q'TY/EA	MATETIALS	NOTE

5X				DR.BY: Kenry
4X				CHKD: Tony
3X				APPD: Billy
2X				
1X	ORIGINAL		Kenry	
REV.	DESCRIPTION		DR.BY	ECN. NO.

GENERAL TOLERANCE:	
LINEAR	ANGLES
X.: ±0.30	X': ±5.0°
X.X: ±0.20	X.X': ±3.0°
X.XX: ±0.15	X.XX': ±2.0°
X.XXX: ±0.10	X.XXX': ±1.0°

PART NO : FCN127S-XXMX-1C
DWG. NO.:
TITLE : SCSi-NP焊线公头 带螺钉
DATE: 6-May-2015

HJBRIGHT® 東莞市華晶電子有限公司 BRIGHT-E ELECTRONIC TECHNOLOGY LIMITED	
SHEET: 1/1	 THIRD ANGLE PROJECTION
SCALE: 1:1	
UNIT: mm	
A4	

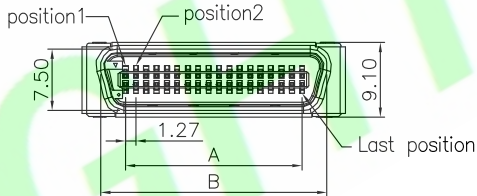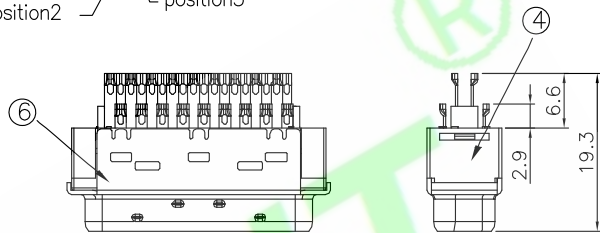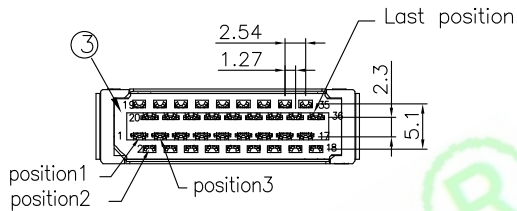

Specifications:

Material And Finish:

Insulator:PBT UL94V-0 Color:Black
Contact Material:Phospor Bronze
Body:Spcc
Contact Area Plated:Sn Over Nickel 50u"
Solder Area Plated:Tin Plated

Rating:

Current Rating: 1 Amp
Voltage Rating:500V AC/DC
Operating Temperature Range:-55°C~+85°C

Electrical:

Contact resistance:35m Ohm Max
Insulator resistance:500M ohm min.
Withstanding Voltage:500V AC/Minute
Wire Accomodation: 24,26,28&30AWG
Packing:Tray

Ordering Information

FCN127S-XXMX-1C

1 2 3 4 5 6

- 1: Series No.
- 2: S:180° Type
- 3: No. of Positions
- 4: M:Male
- 5: B:Selective Gold 5u"
D:Selective Gold 10u"
E:Selective Gold 3u"
H:Selective Gold Flash
- 6: C:In Tray

产品PIN数	DIM A	DIM B
14P	7.62	13.80
20P	11.43	17.61
26P	15.24	21.42
36P	21.59	27.77
50P	30.48	36.66