
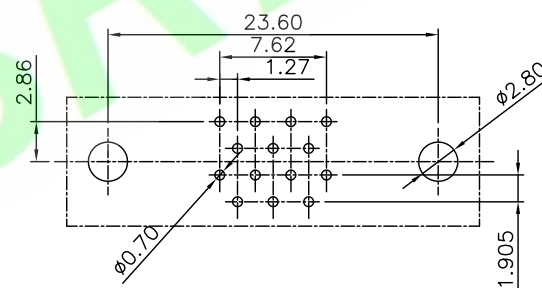

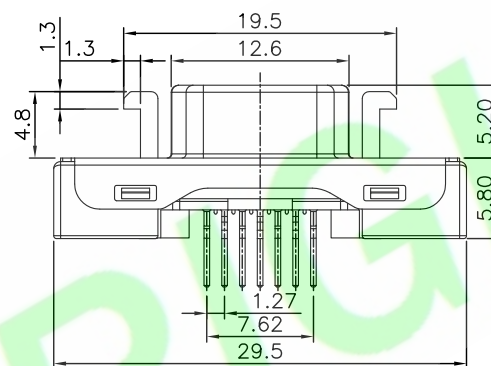



Withstanding Voltage:500V AC/Minute

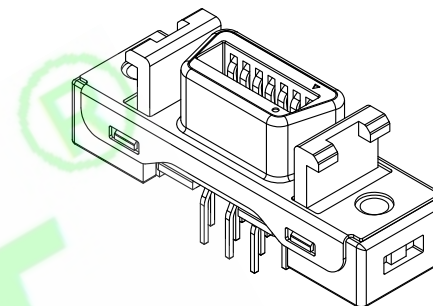

Recommended PCB Layout

$$\overline{1} \quad \overline{2} \quad \overline{3} \quad \overline{4} \quad \overline{5}$$

- 1:— Series No.
2:— S:180° Type
3:— No. of Positions
4:— H:Contact 30U” Gold,
Other area plated Tin
5:— B:In Tube
C:In Tray
D:Tape&Reel

5X				DR.BY.: Samson	GENERAL TOLERANCE:		PART NO : FCN127S-XXH-X	HJBRIGHT[®] 東莞市華晶電子有限公司 BRIGHT-E ELECTRONIC TECHNOLOGY LIMITED			 THIRD ANGLE PROJECTION	A4
4X					LINEAR	ANGLES	DWG. NO.:					
3X				CHKD.: Tony	x.: ±	x': ±5.0°	TITLE :	SHEET: 1/1				
2X					x.x: ±0.30	x.x': ±3.0°	SCSI CN型 180° 插板母头	SCALE: 1:1				
1X	ORIGINAL	joy chen		APPD.: Billy	x.xx: ±0.25	x.xx': ±2.0°		UNIT: mm				
REV.	DESCRIPTION	DR.BY	ECN. NO.		x.xxx: ±0.10	x.xxx': ±1.0°	DATE: 28-Oct-2013					