

Specifications:**Material And Finish:**

Insulator:PBT+30%GF UL94V-0 Color:Black

Contact:Brass

Plated:See Ordering Information

Rating:

Current Rating:6.0 Amp

Voltage Rating:250V AC/DC

Operating Temperature Range:-40°~+100°C

Electrical:

Contact resistance:30m Ohm Max

Insulator resistance:100M ohm min.

Ordering Information**A2537R-48M-01-C**

1 2 3 4 5






1: — Series No.

2: — R/R/A Type



3: — No. of Positions

4: — M:Matte Tin Plated

5: — C:In Tray

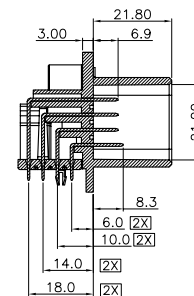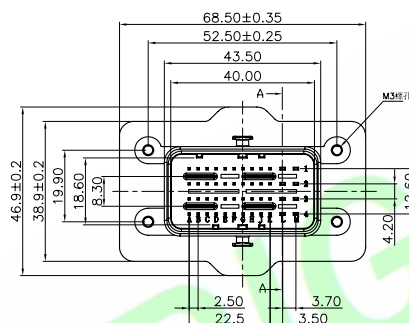

剖面 A-A



Recommended PCB Layout

5X				DR.BY.: Kenry	GENERAL TOLERANCE:		PART NO : A2537R-48M-01-C		HJBRIGHT® 东莞市華晶電子有限公司 BRIGHE-E ELECTRONIC TECHNOLOGY LIMITED		
4X						LINEAR	ANGLES				
3X				CHKD.: Tony	x.: ±0.30	x*: ±5.0°	DWG. NO.:		TITLE : CMC HEADER 48P CONNECTOR		
2X	设计變更	Aaron	20171031			x.x: ±0.20	x.x*: ±3.0°				
1X	ORIGINAL	Kenry		APPD.: Billy	x.xx: ±0.15	x.xx*: ±2.0°	DATE: 23-Aug-2017		SHEET: 1/2		A4
REV.	DESCRIPTION	DR.BY	ECN. NO.			x.xxx: ±0.10			x.xxx*: ±1.0°		