

Specifications:**Material And Finish:**

Insulator:PBT+30% GLASS FILLED,
UL94V-0

Contact:Brass

Contact Plated:Gold Flash Over Tin

Rating:

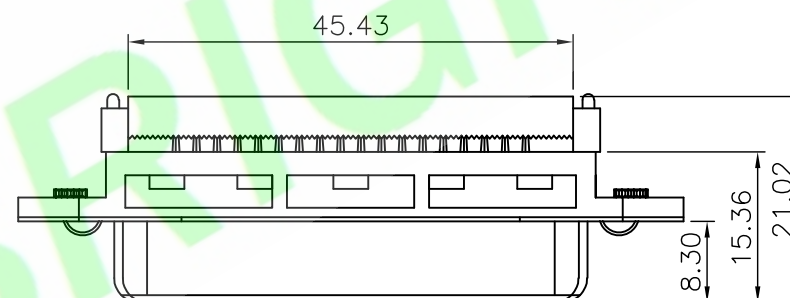


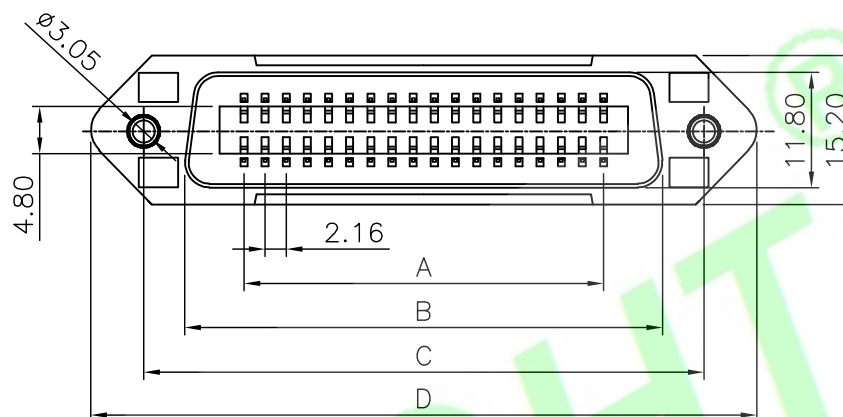
Current Rating:5.0 Amp

Operating Temperature Range:-55°~+105°C

Electrical:

Lusulation resitance:1000MΩ Min At 500V DC


Dielectric Strength:500V For one minute

**Ordering Information**

DB19S-XXFA-01-X
1 2 3 4 5 6

- 1: — Series No.
2: — S:Strtaight Type
3: — No. of Positions
4: — F:Female
5: — A:Gold flash
6: — A:In Bag
B:In Tube
C:In Tray

PINS	DIM	A±0.05	B±0.20	C±0.15	D±0.30
14		12.96	25.20	36.00	43.90
24		23.76	36.00	46.80	54.70
36		36.72	48.90	59.70	67.70
50		51.84	64.10	74.90	82.80

5X				DR.BY.: Bruce	GENERAL TOLERANCE:	PART NO : DB19S-XXFA-01-X	HJBRIGHT® 東莞市華晶電子有限公司 BRIGHT-E ELECTRONIC TECHNOLOGY LIMITED	
4X				CHKD.: Tony	LINEAR ANGLES	DWG. NO.:		
3X				APPD.: Billy	X.: ±0.38 X': ±2.0°	TITLE : 57-P母头 压排式 铁壳型	SHEET: 1/1	 THIRD ANGLE PROJECTION
2X					X.X: ±0.35 X.X': ±1.0°	DATE: 15-Jul-2017	SCALE: 1:1	
1X	ORIGINAL	Bruce			X.XX: ±0.25 X.XX': ±0.5°		UNIT: mm	
REV.	DESCRIPTION	DR.BY	ECN. NO.		X.XXX: ±0.15 X.XXX':			A4