

Specifications:

Material And Finish:

Insulator:PA66 UL94V-0,Color:Natural

Shell:Phosphor Bronze

Plated:See Ordering Information

Rating:

Current Rating:1.0 Amp

Voltage Rating:200V AC/DC

Operating Temperature Range:-25°~+85°C

Electrical:

Contact resistance:30m Ohm Max

Insulator resistance:500M ohm min.

Withstanding Voltage:500V AC/Minute

Ordering Information





A1007H-XXP

1 2 3


1: — Series No.

2: — H:Housing

3: — No. of Positions

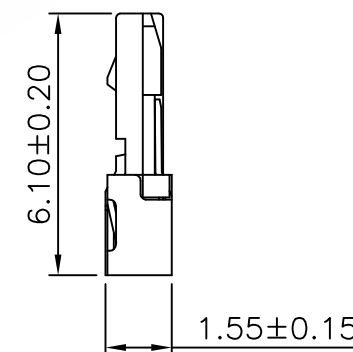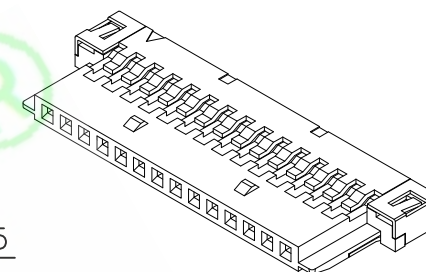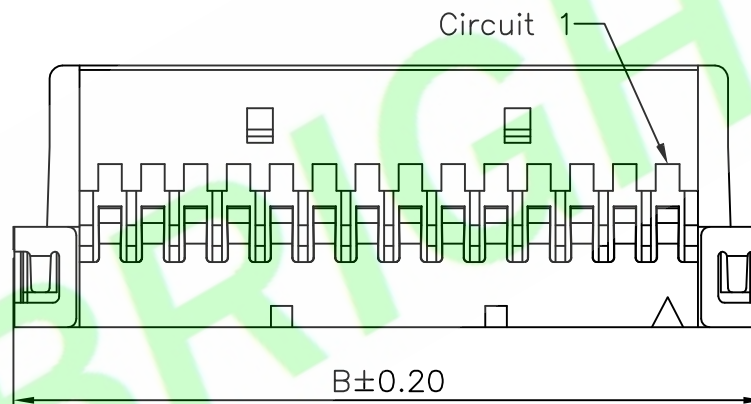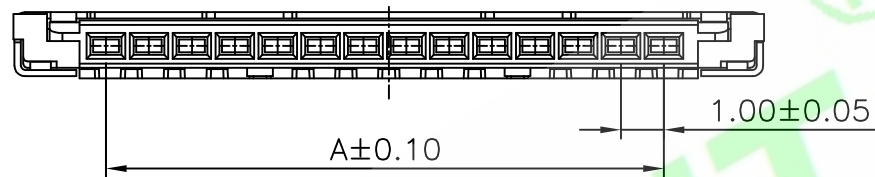

Circuits	Dimensions	
	A	B
08	7.00	11.50
14	13.00	17.50
20	19.00	23.50
30	29.00	33.50

5X				DR.BY.: Samson	GENERAL TOLERANCE:		PART NO : A1007H-XXP	HJBRIGHT[®] 東莞市華晶電子有限公司 BRIGHT-E ELECTRONIC TECHNOLOGY LIMITED		
4X					LINEAR	ANGLES	BURY P/N:			
3X				CHKD.: Tony	x.: ±0.30	x': ±5.0°	TITLE : 1.0mm Pitch Housing	SHEET: 1/1		A4
2X				APPD.: Billy	x.x: ±0.20	x.x': ±3.0°		SCALE: 1:1		
1X	ORIGINAL	Samson			x.xx: ±0.10	x.xx': ±2.0°		UNIT: mm		
REV	DESCRIPTION	DR.BY	ECN. NO.		x.xxx: ±0.10	x.xxx': ±1.0°	DATE: 21-Oct-2017			