

Specifications:

Material And Finish:

Insulator:PA6T UL94V-0 Color:Natural

Contact:Phosphor Bronze

Plated:See Ordering Information

Rating:

Current Rating:1.0 Amp

Voltage Rating:100V AC/DC


Operating Temperature Range:-25°~+85°C

Electrical:

Contact resistance:30m Ohm Max

Insulator resistance:500M ohm min.

Withstanding Voltage:500V AC/Minute

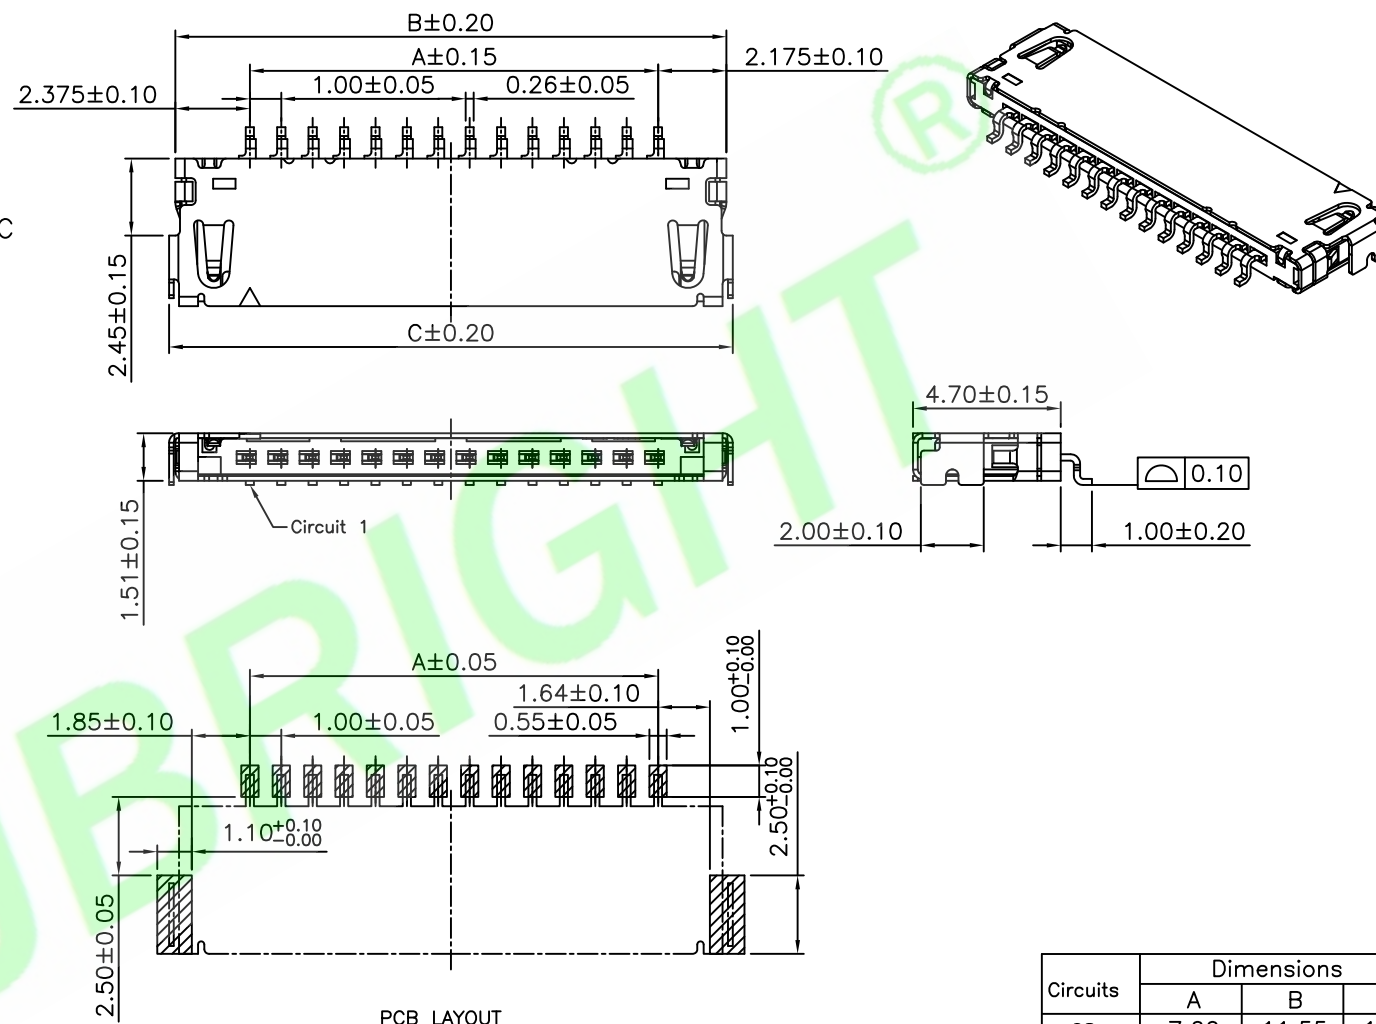

Ordering Information

A1007H-XXX-01-D

1 2 3 4 5

- 1: — Series No.
2: — H:Horizontal SMT Type
3: — No. of Positions
4: — A:Gold Flaash
Q: Tin Plated
5: — D: In Tape&Reel

Circuits	Dimensions		
	A	B	C
08	7.00	11.55	11.95
14	13.00	17.55	17.95
20	19.00	23.55	23.95
30	29.00	33.55	33.95

5X				DR.BY.: Samson	GENERAL TOLERANCE:		PART NO : A1007H-XXX-01-D	
4X					LINEAR	ANGLES	DWG. NO.:	
3X				CHKD.: Tony	X.: ±0.30	X': ±5.0°	TITLE :	
2X					X.X: ±0.25	X.X': ±3.0°	1.0mm Pitch Wafer Horizontal SMT Type	
1X	ORIGINAL	Samson		APPD.: Billy	X.XX: ±0.15	X.XX': ±2.0°	DATE: 02-Jun-2017	
REV.	DESCRIPTION	DR.BY	ECN. NO.		X.XXX: ±0.10	X.XXX': ±1.0°	UNIT: mm	

HJBRIGHT® 东莞市華晶電子有限公司
BRIGHT-E ELECTRONIC TECHNOLOGY LIMITED

SHEET: 1/1

SCALE: 1:1

UNIT: mm



THIRD ANGLE PROJECTION

A4