

Specifications:

Material And Finish:

Insulator:PA46 UL94V-0,Color:Natural

Shell:Stainless

Plated:See Ordering Information

Rating:

Current Rating:1.0 Amp

Voltage Rating:200V AC/DC

Operating Temperature Range:-25°~+85°C

Electrical:

Contact resistance:40m Ohm Max

Insulator resistance:100M ohm min.

Withstanding Voltage:500V AC/Minute

Ordering Information



A1008H-30P

1 2 3

1: — Series No.

2: — H:Housing

3: — No. of Positions

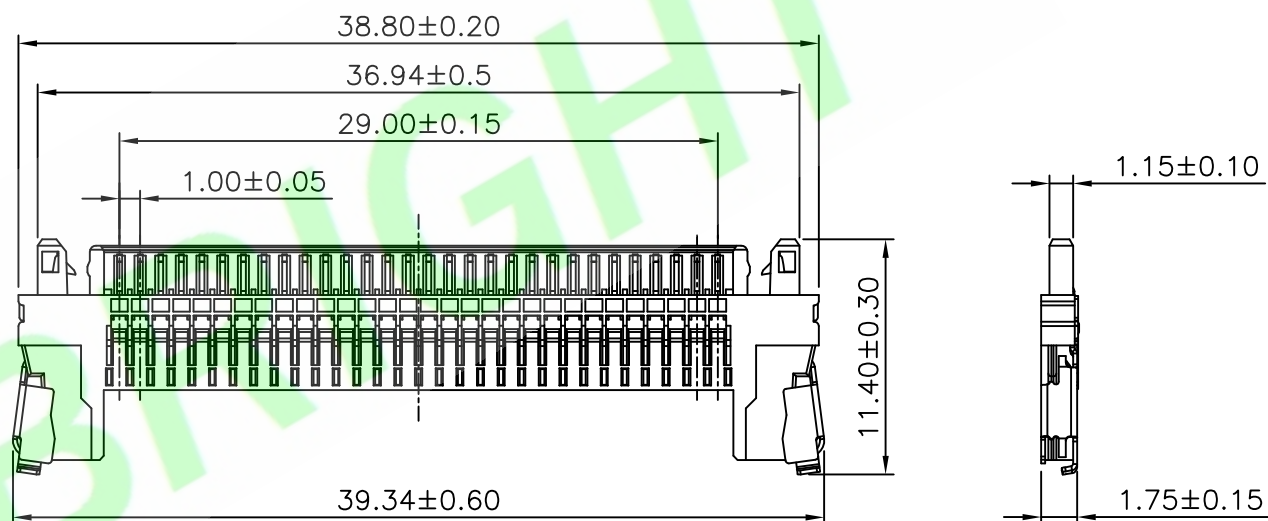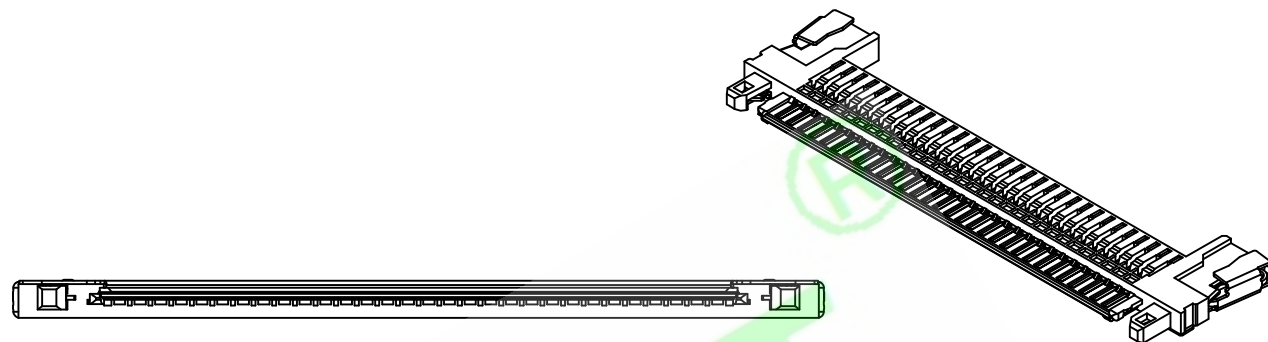

5X				DR.BY.: Samson	GENERAL TOLERANCE:		PART NO : A1008H-30P	HJBRIGHT [®] 東莞市華晶電子有限公司 BRIGHT-E ELECTRONIC TECHNOLOGY LIMITED			
4X					LINEAR	ANGLES					
3X				CHKD.: Tony	x.: x.x:	x': x.x':	BURY P/N:	SHEET: 1/1 SCALE: 1:1			
2X					±0.30	±3.0°	TITLE : 1.0mm Pitch Housing				
1X	ORIGINAL	Samson		APPD.: Billy	x.xx: ±0.20	x.xx': ±2.0°	DATE: 05-Oct-2017	UNIT: mm			
REV	DESCRIPTION	DR.BY	ECN. NO		x.xxx: ±0.10	x.xxx': ±1.0°		THIRD ANGLE PROJECTION			