





Plated: See Ordering Information

Operating Temperature Range: $-40^{\circ}\sim+105^{\circ}\text{C}$


Withstanding Voltage:500V AC/Minute

$$\overline{1} \quad \overline{2} \quad \overline{3} \quad \overline{4} \quad \overline{5}$$

- C:\n Tray

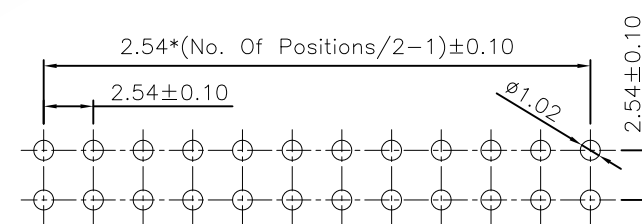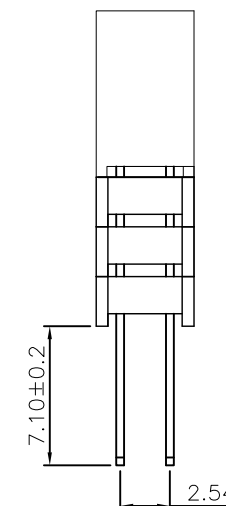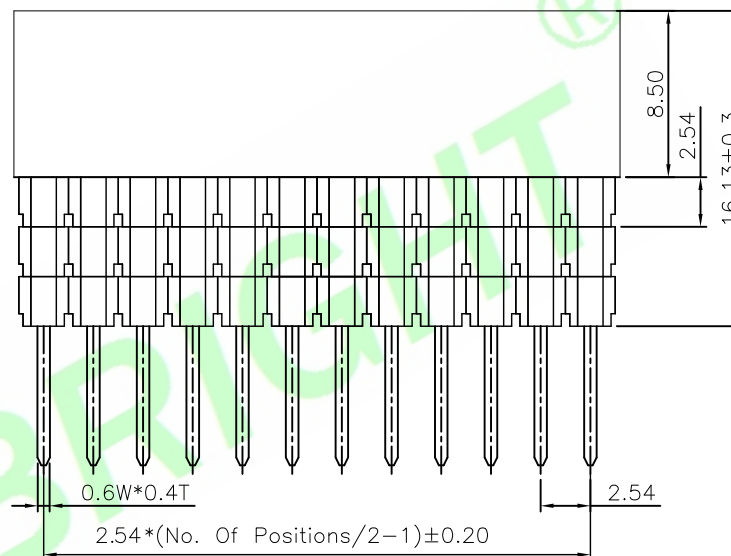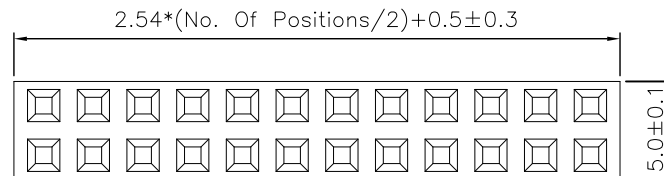

Recommended PCB Layout

5X				DR.BY.: Aaron	GENERAL TOLERANCE:		PART NO : S25442S3-XXX85-NX		HJBRIGHT® 東莞市華晶電子有限公司 BRIGHT-E ELECTRONIC TECHNOLOGY LIMITED		
4X					LINEAR	ANGLES	DWG. NO.:				
3X				CHKD.: Tony	x.: ±0.30	x': ±5.0"	TITLE : 2.54mm Pitch PCB Socket Header Straight Type				
2X					x.x: ±0.20	x.x': ±3.0"					
1X	ORIGINAL	Aaron		APPD.: Billy	x.xx: ±0.15	x.xx': ±2.0"	DATE: 18-May-2019		SHEET: 1/1	 THIRD ANGLE PROJECTION	A4
REV.	DESCRIPTION	DR.BY	ECN. NO.		x.xxx: ±0.10	x.xxx': ±1.0"			SCALE: 1:1		
									UNIT: mm		