

Specifications:**Material And Finish:**

Insulator:PBT UL94V-0 Color:Black
Contact Material:Phospor Bronze
Body:Spcc
Contact Area Plated:Sn Over Nickel 50u"
Solder Area Plated:Tin Plated

Rating:

Current Rating: 1 Amp
Voltage Rating:500V AC/DC
Operating Temperature Range:-55°C~+85°C






Electrical:


Contact resistance:35m Ohm Max
Insulator resistance:500M ohm min.
Withstanding Voltage:500V AC/Minute

Ordering Information**FCN127S-68MX-4C**

1 2 3 4 5 6

- 1: Series No.
2: S:180° Type
3: No. of Positions
4: M:Male
5: B:Selective Gold 5u"
H:Selective Gold Flash
6: C:In Tray

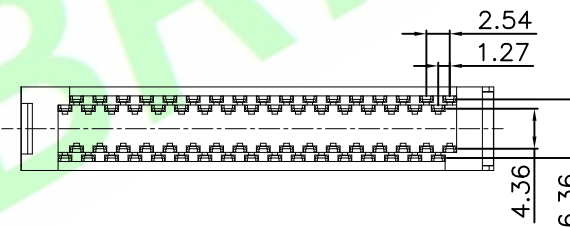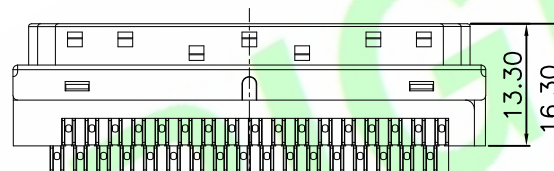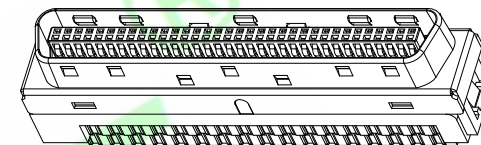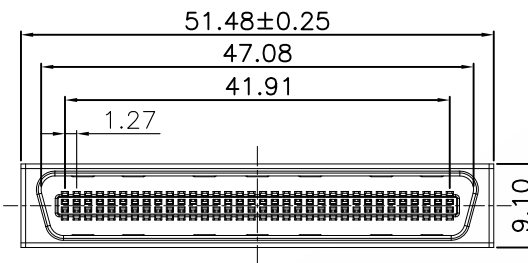

5X				DR.BY.: Aaron	GENERAL TOLERANCE:		PART NO : FCN127S-68MX-4C	HJBRIGHT® 東莞市華晶電子有限公司 BRIGHT-E ELECTRONIC TECHNOLOGY LIMITED SHEET: 1/1 SCALE: 1:1 UNIT: mm  A4		
4X					CHKD.: Tony	LINEAR	ANGLES			
3X				APPD.: Billy		x.: ±0.38	x': ±5.0°			
2X					x.x: ±0.35	x.x': ±3.0°	DATE: 6-May-2017			
1X	ORIGINAL	Aaron		x.xx: ±0.25	x.xx': ±2.0°					
REV.	DESCRIPTION	DR.BY	ECN. NO.		x.xxx: ±0.15	x.xxx': ±1.0°				