

Material And Finish:

Contact: Phosphor Bronze

Plated: See Ordering Information

Current Rating: 3.0 Amp

Voltage Rating: 250V AC/DC
Operating Temperature Range: $-40^{\circ}\sim +105^{\circ}\text{C}$




Contact resistance: 20m Ohm Max

Insulator resistance:1000M ohm min.
Withstanding Voltage:500V AC/Minute

S25492M-XXX81-X-0X

1	2	3	4	5	6	7
---	---	---	---	---	---	---

- 1:—Series No.
- 2:—M:SMT Type
- 3:—No. of Positions
- 4:—A:Gold Flash
H:Selective Gold Plated
Q:Tin Plated
- 5:—A=6.1MM
B=5.72MM
- 6:—O:W/Peg
- 7:—A:n bag
B:n Tube
C:n Tray

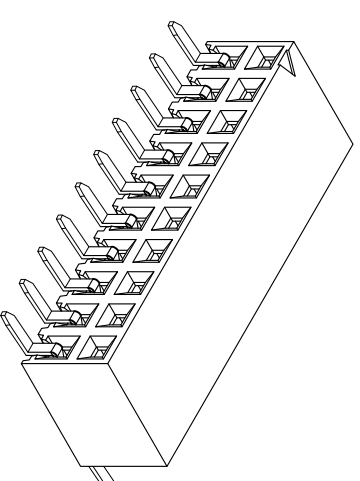

--	--

三

□