


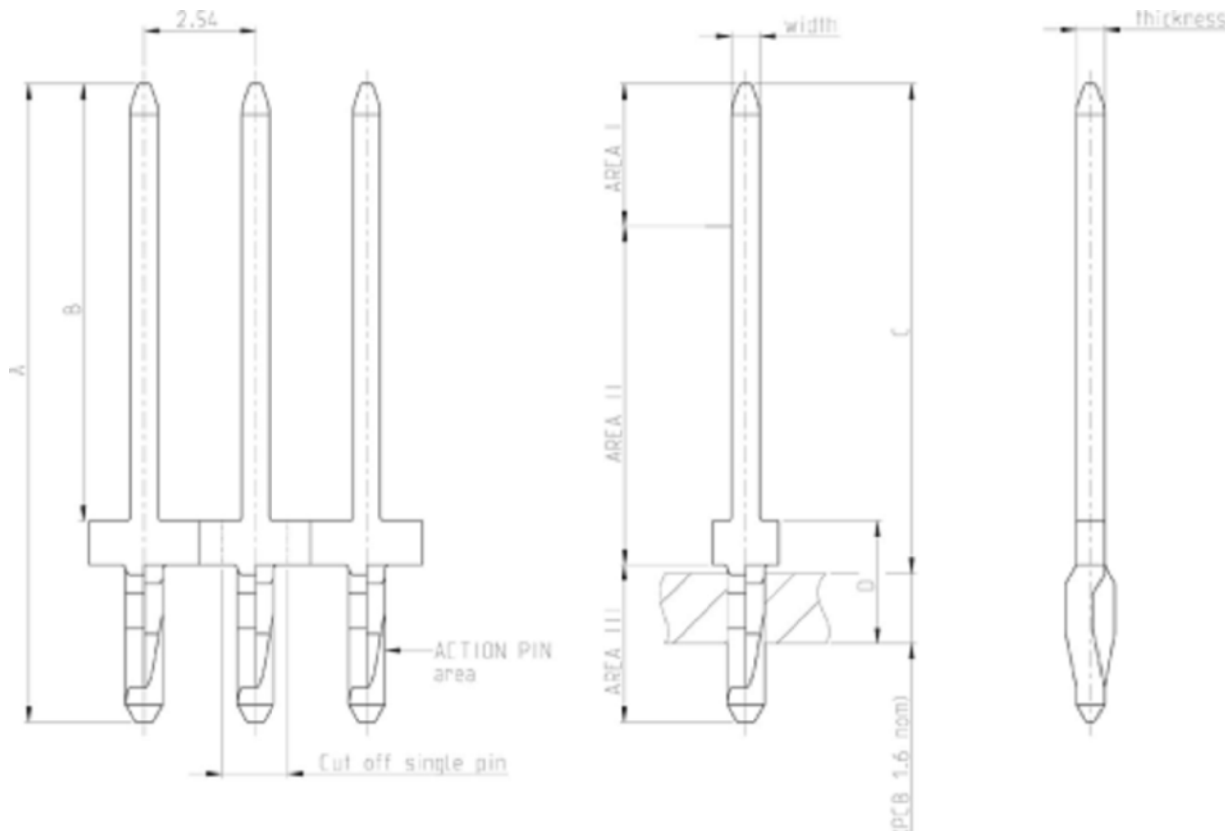

Technical Features

Press-fit zone

ACTION PIN

Material thickness

0.6 mm

Total Temperature Range

-65 °C ... +125 °C

Insertion Force

Max 180 N

Push-out Force

Min 50 N

Current Carrying Capacity

up to 5 Ampere

(@ 80 °C ambient temperature)

P/N	Pitch (mm)	Width x Thickness (mm)	Dimensions: (mm)				Finish
			A	B	C	D	
F254-063X063-0705-TW	2.54	0.63X0.63	11.65	7.05	8.25	2.80	Sn
F254-063X063-0880-TW	2.54	0.63X0.63	13.40	8.80	10.00	2.80	Sn

5X				DR.BY.: Aaron	GENERAL TOLERANCE:		PART NO : F254-063*063-XXXX-TW		HJBRIGHT® 東莞市華晶電子有限公司 BRIGHT-E ELECTRONIC TECHNOLOGY LIMITED THIRD ANGLE PROJECTION A4		
4X					LINEAR	ANGLES	DWG. NO.:				
3X				CHKD.: Tony	x.: ±0.30	x': ±5.0°	TITLE : 2.54mm Pitch Press-fit				
2X					x.x: ±0.20	x.x': ±3.0°	DATE: 28-11-2019				
1X	ORIGINAL	Aaron		APPD.: Billy	x.xx: ±0.15	x.xx': ±2.0°	UNIT: mm				
REV.	DESCRIPTION	DR.BY	ECN. NO.		x.xxx: ±0.10	x.xxx': ±1.0°					