


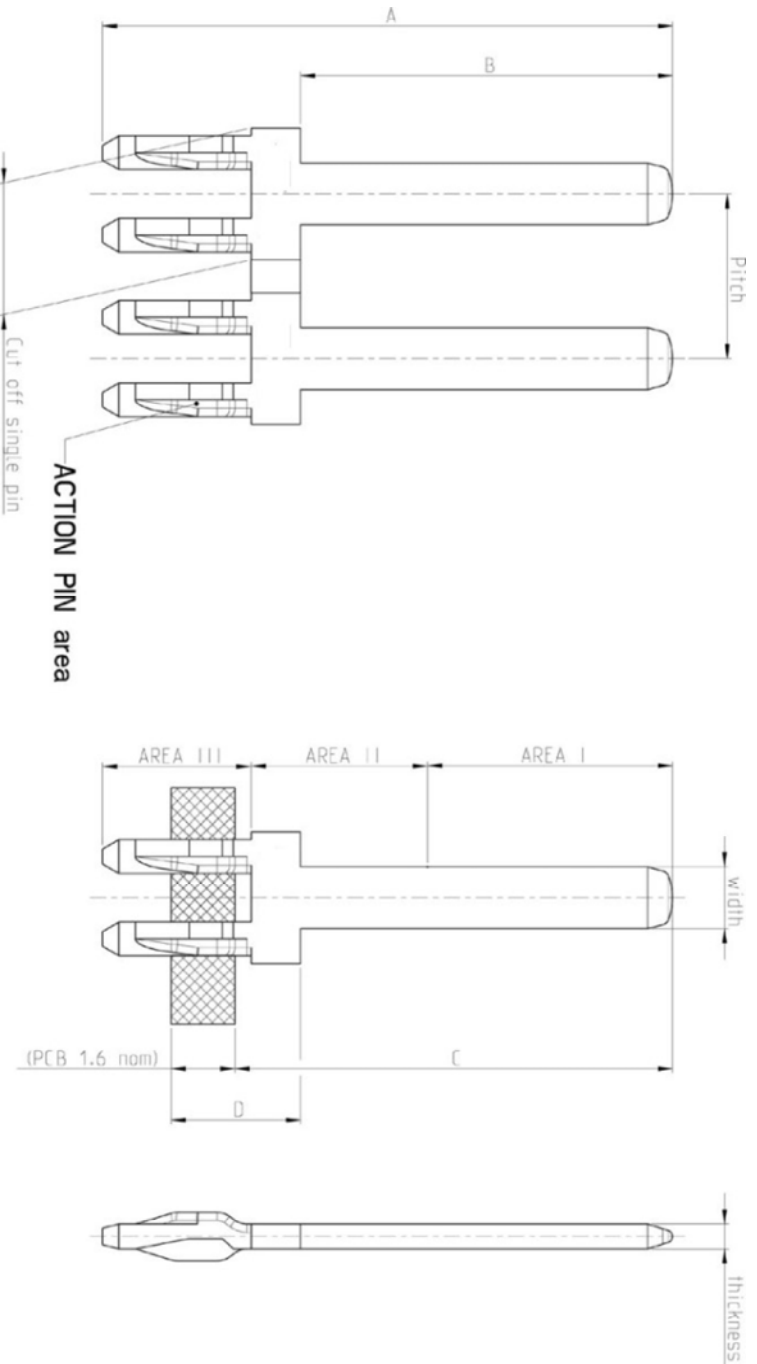

Technical Features
 Press-fit zone
 ACTION PIN
 Material thickness
 0.6 / 0.8 mm
 Total Temperature Range
 -40 °C ... +125 °C
 Insertion Force
 Max 400 N
 Push-out Force
 Min 80 N
 Current Carrying Capacity
 up to 24 Ampere
 (@ 80° C ambient temperature)

P/N	Pitch (mm)	Width x Thickness (mm)	Dimensions (mm)				Finish
			A	B	C	D	
R400-150X060-0900-TW	4.00	1.50X0.60	13.80	9.00	10.50	3.10	Sn
P500-280X080-0940-TW	5.00	2.80X0.80	14.90	9.40	11.30	3.50	Sn
P508-280X080-0790-TW	5.08	2.80X0.60	13.40	7.90	10.00	3.70	Sn
P540-280X080-1075-TW	5.40	2.80X0.80	18.50	10.75	13.50	5.15	Sn

5X			DR.BY: Aaron	GENERAL TOLERANCE:		PART NO : F400-150*060-0900-TW	HIBRIGHT® 东莞市華晶電子有限公司	
4X				LINEAR		DWG. NO.:	BRIGHT-E ELECTRONIC TECHNOLOGY LIMITED	
3X				ANGLES		TITLE :	Press-fit	
2X				T only			SHEET: 1/1	
1X	ORIGINAL	Aaron		X.X: ±0.20 X.X: ±3.0°			SCALE: 1:1	
REV.	DESCRIPTION	DR.BY	ECN. NO.	X.XXX: ±0.10 X.XXX: ±1.0°		DATE: 28-11-2019	THIRD ANGLE PROJECTION	
1		2	3	4	5	6	7	8