


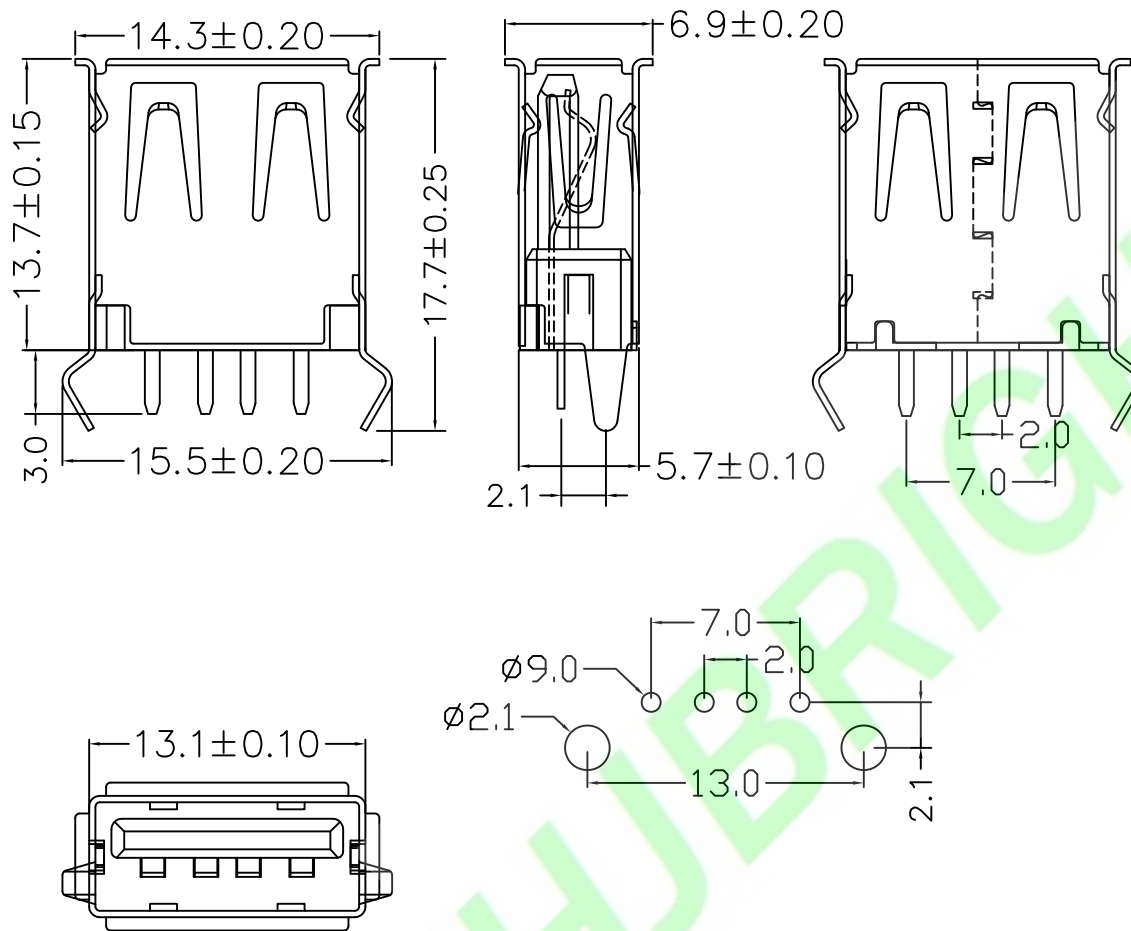

Specifications:

Electrical:

- 1.Current Rating
1.5A/contact terminal
- 2.Voltage Rating
30V DC
- 3.Contact Resistance
30 milliohms MAX
- 4.Dielectric Withstanding Voltage:
500 V AC AT Sea Level
- 5.Insulation Resistance:
1000MEGA ohms MIN.

Mechanical:

- 1.Connector Mate and Unmate Force
Mate force:3.57kgf MAX.
Unmate force:1.02kgf MIN.

Material:

- 1.Housing:PBT
High Temperature Thermoplastics,
- 2.Contact:Copper Alloy C2680
- 3.Shell: SPCC

5.Finish:

- 1.Contact: Plated Gold 1U" in Mating Area;
Tin 100-200U" On Solder Tails
- 2.Shell:Nickel Plating 80U" MIN.

P/N NOTES:

QB02-NWSB020-SN	外壳SPCC 镀镍50u", 端子镀金1u", 塑胶PBT白色
QB02-NWSB020-CN	外壳黄铜 镀镍50u", 端子镀金1u", 塑胶PA9T白色
QB02-PWSB020-SN	外壳SPCC 镀镍50u", 端子镀金1u", 塑胶PBT白色
QB02-PWSB020-CN	外壳黄铜 镀镍50u", 端子镀金1u", 塑胶PBT白色

SPECIFICATION

0-4	1-4	2-4	3-4			一般公差 GENERAL TOL	制图 DRAWN	Sophia	东莞市华晶电子有限公司 dongguan huajing electronic Co.,LTD		张数 SHEET	OF
0-5	1-3	2-3	3-3			.X: ±0.10 .XX: ±0.05 .XXX: ±0.03	审核 CHECKED	Tony			单位 UNIT	mm
0-2	1-2	2-2	3-2			.X: ±2° .X': ±1.5° .XX': ±1.5°	核准 APPROVAL	Billy	产品名称 PRODUCT NAME	USB2.0-AF180度插板式(弯脚有边) 13.7	比例 SCALE	5
0-1	1-1	2-1	3-1				角法 PROJ.		产品料号 PART NO	QB02-PWSB020-SN	图号 DWG NO	9
版本 REV	变更说明 MODIFICATION		签名 SIGN	时间 DATE	审核 CHECKED	时间 DATE						
1	2		3		4			5	6		7	