

Material And Finish:

Insulator:PBT UL94V-0 Color:Black
Contact:Copper alloy

Current Rating:1.5 Amp
Voltage Rating:125V AC/DC
Operating Temperature Range:-40°~+85°C





Contact resistance:20m Ohm Max
Insulator resistance:500M ohm min.
Withstanding Voltage:1500V AC/Minute

Durability:750 Cycles Min


MJ034S-8P8CX-0C

$$\overline{1} \quad \overline{2} \quad \overline{3} \quad \overline{4} \quad \overline{5} \quad \overline{67}$$

- 1: — Series No.
2: — S: Straight Type
3: — No. of Positions
4: — No. of Contact
5: — A: Selective Gold Flash
 B: Selective Gold Plated $3\mu''(0.075\mu m)$
 C: Selective Gold Plated $6\mu''(0.15\mu m)$
 D: Selective Gold Plated $10\mu''(0.25\mu m)$
6: — 0: W/O Flange
7: — C: In Tray

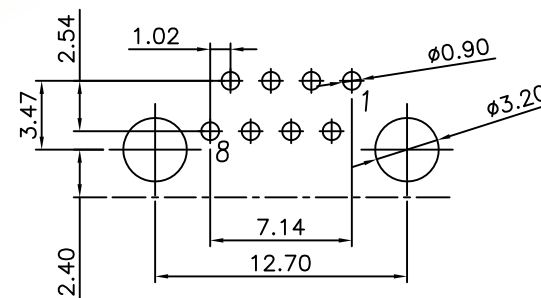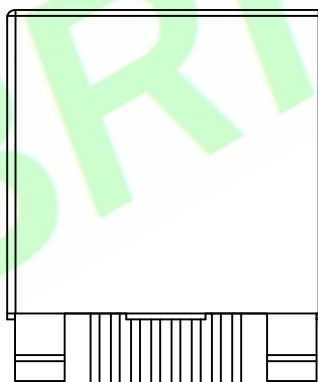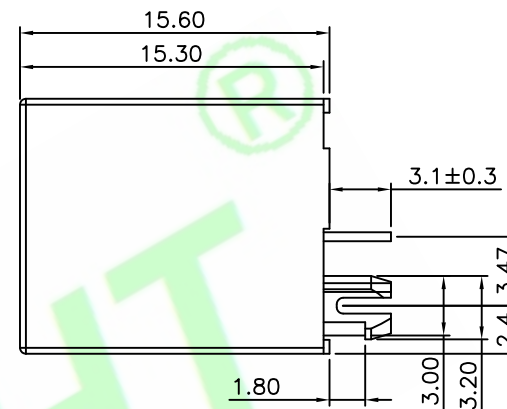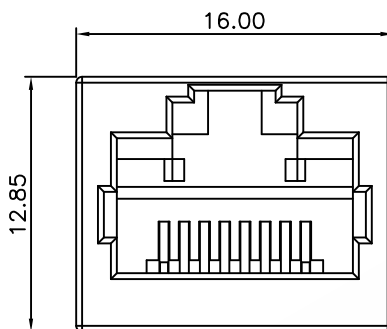

SUGGESTED PCB LAYOUT
(TOP VIEW)

5X			DR.BY.: Jack	GENERAL TOLERANCE:		PART NO : MJ034S-8P8CX-0C	HJBRIGHT [®] 東莞市華晶電子有限公司 BRIGHT-E ELECTRONIC TECHNOLOGY LIMITED		
4X					LINEAR	ANGLES			
3X			CHKD.: Kenry	X.: ±0.40	X': ±5.0°	TITLE : 8P8C Modular jack Straight Type	SHEET: 1/1		A4
2X				X.X: ±0.30	X.X': ±3.0°		SCALE: 1:1		
1X	ORIGINAL	Jack	APPD.:	X.XX: ±0.20	X.XX': ±2.0°		DATE: 10-May-2016		
REV.	DESCRIPTION	DR.BY	ECN. NO.	X.XXX: ±0.10	X.XXX': ±1.0°				