

Specifications:**Material And Finish:**

Insulator:Nylon 6T UL94V-0 Color:Black

Contact:Brass

Plated:See Ordering Information

Rating:

Current Rating:1.0 Amp

Voltage Rating:100V AC/DC

Operating Temperature Range:-40~+105°C

Electrical:

Contact resistance:40m Ohm Max

Insulator resistance:500M ohm min.

Withstanding Voltage:500V AC/Minute

Ordering Information**B12722S-XXX-02-NX**

1 2 3 4 5

1:— Series No.

2:— S:Straight Type

3:— No. of Positions

4:— A:Gold Flash

H:Selective Gold Plated



Y:30u" Gold on contact;Matte Tin on tail

Q:Tin Plated


5:— A:In bag

B:In Tube

C:In Tray

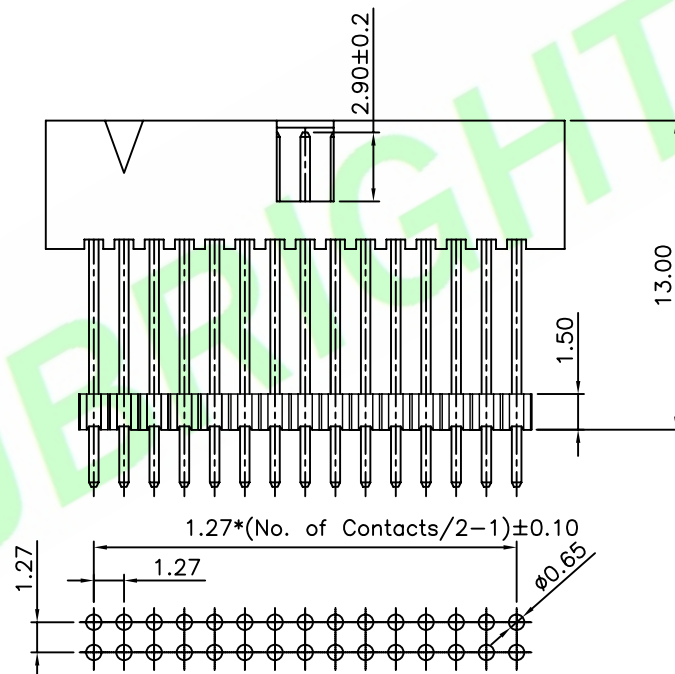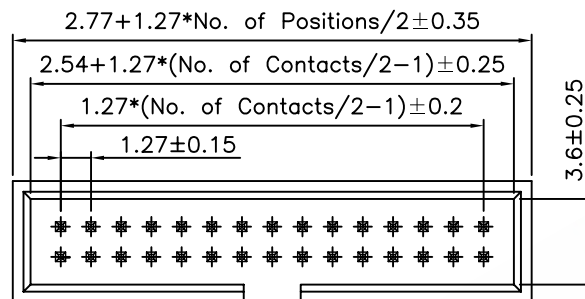

Recommended PCB Layout(Tolerance:0.05mm)

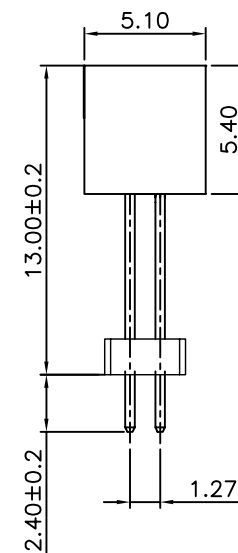

5X				DR.BY.: Kenry	GENERAL TOLERANCE:		PART NO : B12722S-XXX-02-NX	HJBRIGHT 東莞市華晶電子有限公司 BRIGHE-E ELECTRONIC TECHNOLOGY LIMITED		
4X					LINEAR	ANGLES	DWG. NO.:			
3X				CHKD.: Tony	x.: ±0.30	x°: ±5.0°	TITLE : 1.27mm Pitch Box Header Straight Type	SHEET: 1/1		A4
2X					x.x: ±0.20	x.x°: ±3.0°		SCALE: 1:1		
1X	ORIGINAL	Kenry		APPD.: Billy	x.xx: ±0.15	x.xx°: ±2.0°		UNIT: mm		
REV.	DESCRIPTION	DR.BY	ECN. NO.		x.xxx: ±0.10	x.xxx°: ±1.0°	DATE: 12-May-2016	THIRD ANGLE PROJECTION		