

Specifications:

Material And Finish:




Insulator:Nylon 6T UL94V-0 Color:Black
Contact:Brass
Plated:See Ordering Information

Rating:

Current Rating:1.0 Amp
Voltage Rating:100V AC/DC
Operating Temperature Range:-40°~+105°C

Electrical:

Contact resistance:40m Ohm Max
Insulator resistance:500M ohm min.
Withstanding Voltage:500V AC/Minute

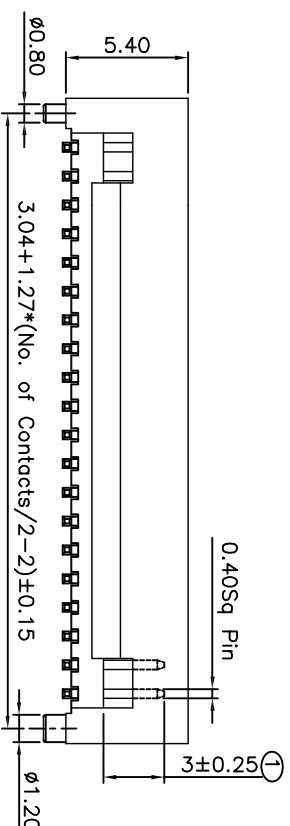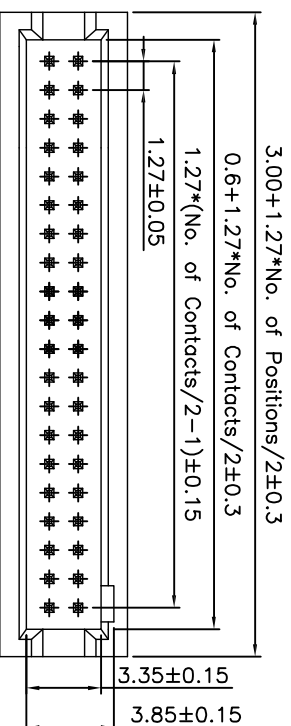


Ordering Information
B1272M-XXX-01-1X

1 2 3 4 5

- 1: — Series No.
- 2: — M:SMT Type
- 3: — No. of Positions
- 4: — A:Gold Flash
H:Selective Gold Plated
Q:Tin Plated
- 6: — A:In bag
B:In Tube
F:W/Cap In Tape&Reel

Recommended PCB Layout

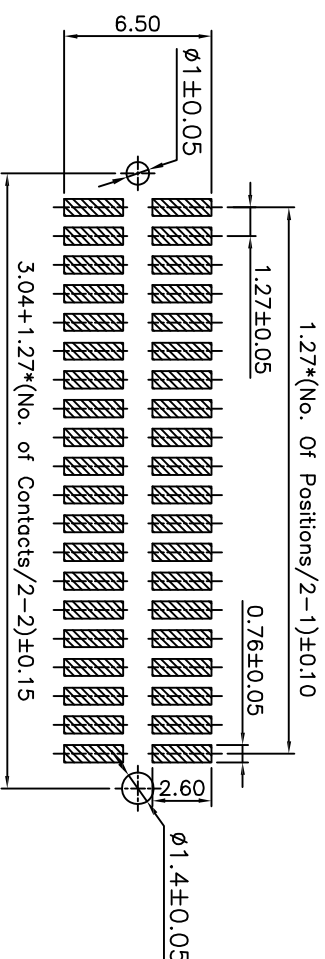

5X				DR.BY:	GENERAL TOLERANCE:		PART NO : B1272M-XXX-01-1X		HJBRIGHT® 東莞市華晶電子有限公司 BRIGHE-E ELECTRONIC TECHNOLOGY LIMITED THIRD ANGLE PROJECTION A4			
4X					LINEAR		DWG. NO.: RD0805-043					
3X				CHKD: 朱波	X: ±0.30	X: ±5.0°	TITLE : 1.27mm Pitch Box Header SMT Type					
2X					X: ±0.20	X: ±3.0°						
1X	ORIGINAL	joy chen		APPD:	X: ±0.15	X: ±2.0°						
REV.	DESCRIPTION	DR.BY	ECN. NO.	X: ±0.10	X: ±1.0°							
1		2		3	4	5	6	7	8			