

Specifications:

Material And Finish:

Insulator:Nylon 6T UL94V-0 Color:Black

Contact:Brass

Plated:See Ordering Information

Rating:

Current Rating:1.0 Amp

Voltage Rating:100V AC/DC

Operating Temperature Range:-40°~+105°C

Electrical:

Contact resistance:40m Ohm Max

Insulator resistance:500M ohm min.

Withstanding Voltage:500V AC/Minute

Ordering Information

B2754S-XXX-01-X

1 2 3 4 5

1:—Series No.

2:—S:Straight Type

3:—No. of Positions




4:—A:Gold Flash

H:Selective Gold Plated

Q:Tin Plated

6:—A:In bag

B:In Tube

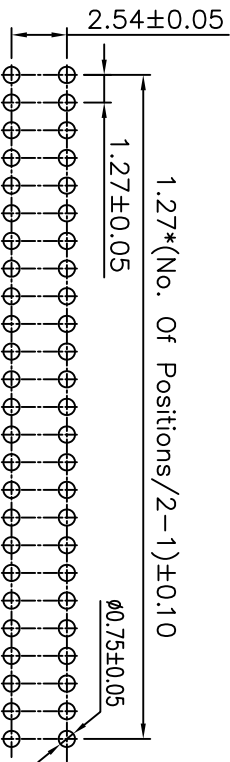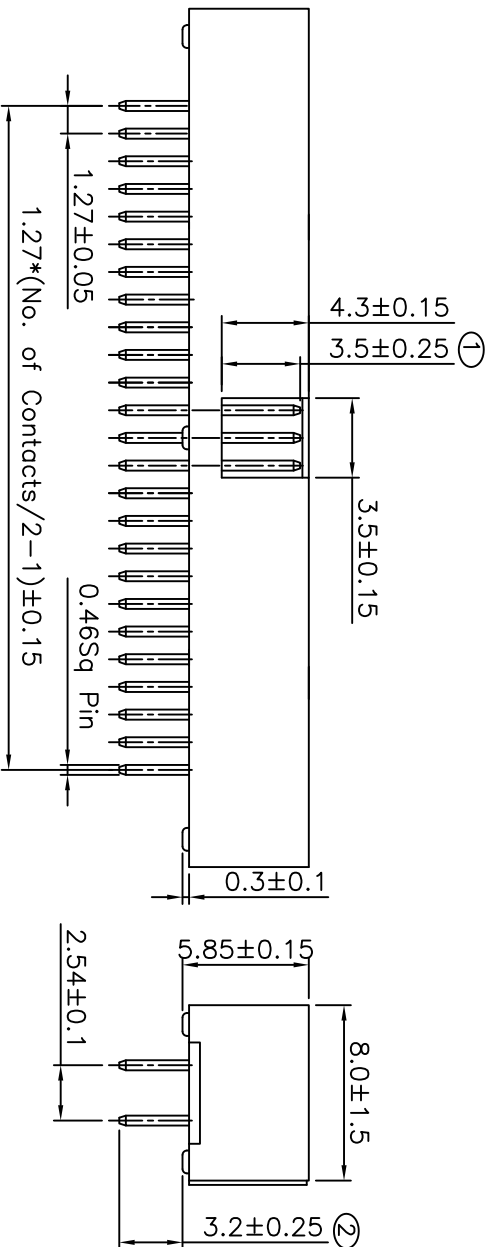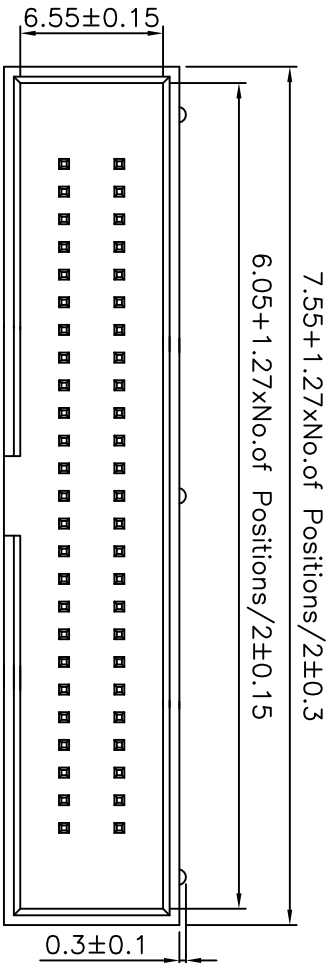

Recommended PCB Layout

5X			DR.BY.:	GENERAL TOLERANCE:		PART NO : B2754S-XXX-01-X		HIBRIGHT		東莞市華晶電子有限公司	
4X				LINEAR		DWG. NO.: RD0805-064		BRIGHE-E ELECTRONIC TECHNOLOGY LIMITED			
3X				X: ±0.30	X: ±5.0°	TITLE : 1.27*2.54mm Pitch Box Header Straight Type		SHEET: 1/1		THIRD ANGLE PROJECTION	
2X				X.X: ±0.20	X.X: ±3.0°						
1X	ORIGINAL	joy chen	APD.:	X.XX: ±0.15	X.XX: ±2.0°						
REV.	DESCRIPTION	DR.BY	ECN. NO.	X.XXX: ±0.10	X.XXX: ±1.0°	DATE: 17-May-2008		UNIT: mm			
1		2	3	4	5	6	7			A4	