

Specifications:

Material And Finish:

Insulator:Nylon 6T UL94V-0 Color:Black

Contact:Brass

Plated:See Ordering Information

Rating:

Current Rating:1.0 Amp

Voltage Rating:100V AC/DC

Operating Temperature Range:-40°~+105°C

Electrical:

Contact resistance:40m Ohm Max

Insulator resistance:500M ohm min.

Withstanding Voltage:500V AC/Minute

Ordering Information

B2754M-XXX-01-0X

1 2 3 4 5

1:— Series No.

2:— M:SMT Type

3:— No. of Positions

4:— A:Gold Flash






H:Selective Gold Plated

Q:Tin Plated

5:— A:In bag

B:In Tube

F:W/Cap In Tape&Reel

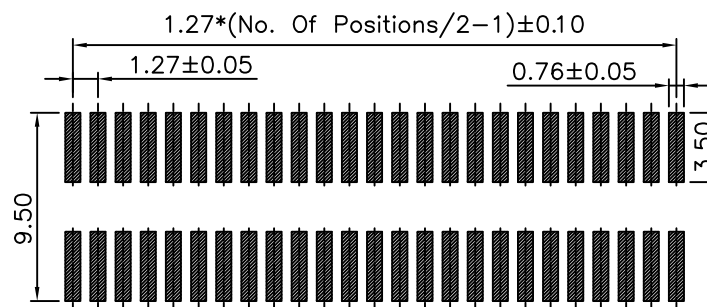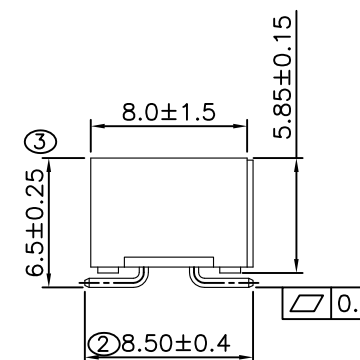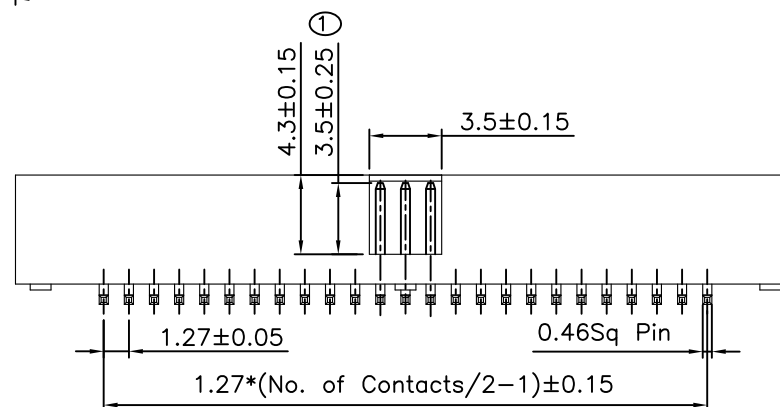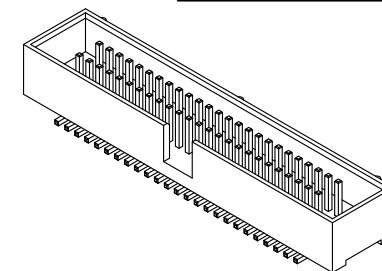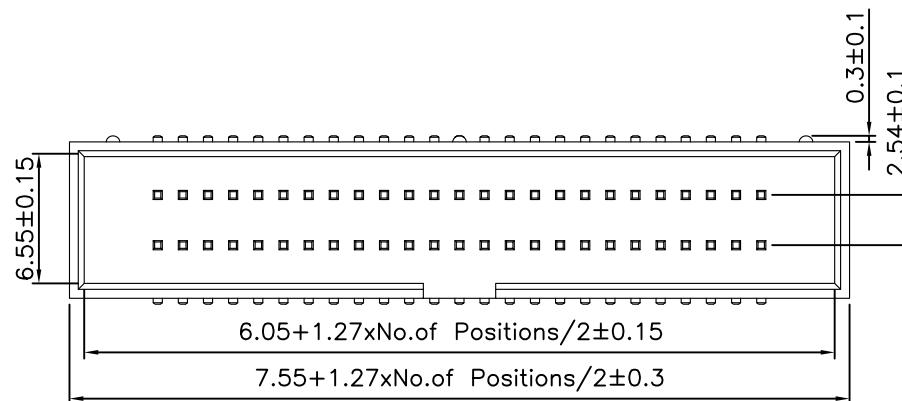

Recommended PCB Layout

5X				DR.BY.: 曾冬明	GENERAL TOLERANCE:		PART NO : B2754M-XXX-01-0X	HJBRIGHT 東莞市華晶電子有限公司 BRIGHE-E ELECTRONIC TECHNOLOGY LIMITED		
4X					LINEAR	ANGLES	DWG. NO.: RD0805-066			
3X				CHKD.: 朱 波	x.: ±0.30	x°: ±5.0°	TITLE : 1.27*2.54mm Pitch Box Header SMT Type			
2X					x.x: ±0.20	x.x°: ±3.0°				
1X	ORIGINAL	joy chen		APPD.: 尹友江	x.xx: ±0.15	x.xx°: ±2.0°				
REV.	DESCRIPTION	DR.BY	ECN. NO.		x.xxx: ±0.10	x.xxx°: ±1.0°	DATE: 17-May-2008			
								SHEET: 1/1		A4
								SCALE: 1:1		
								UNIT: mm		