

Specifications:**Material And Finish:**

Insulator:LCP UL94V-0 Color:Black

Nylon 6T UL94-0 Color:Black

Contact:Brass

Plated:See Ordering Information

Rating:

Current Rating:1.0 Amp

Voltage Rating:100V AC/DC

Operating Temperature Range:-40°~+105°C

Electrical:

Contact resistance:40m Ohm Max

Insulator resistance:500M ohm min.

Withstanding Voltage:500V AC/Minute

Ordering Information**B1273M-XXX-01-CX**

1 2 3 4 5 6

1: — Series No.

2: — M:SMT Type

3: — No. of Positions

4: — A:Gold Flash

H:Selective Gold Plated

K:15u" Gold on contact;Gold flash on tail

L:15u" Gold on contact;Matte Tin on tail

P:30u" Gold on contact;Gold flash on tail.

Q:Tin Plated





5: — 0:LCP UL94V-0 Color:Black

C:Nylon 6T UL94-0 Color:Black

6: — A:In bag

B:In Tube

F:W/Cap In Tape&Reel

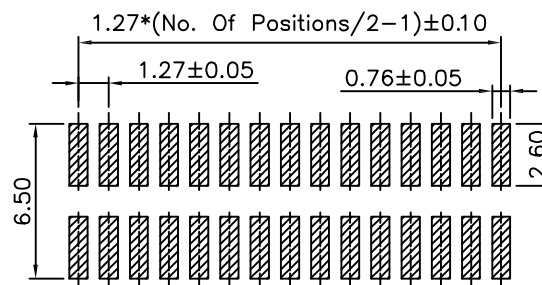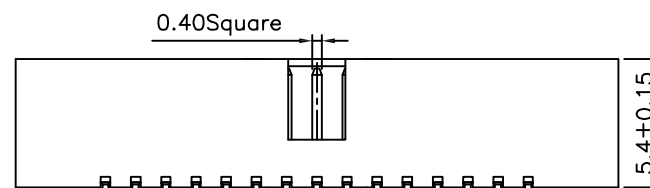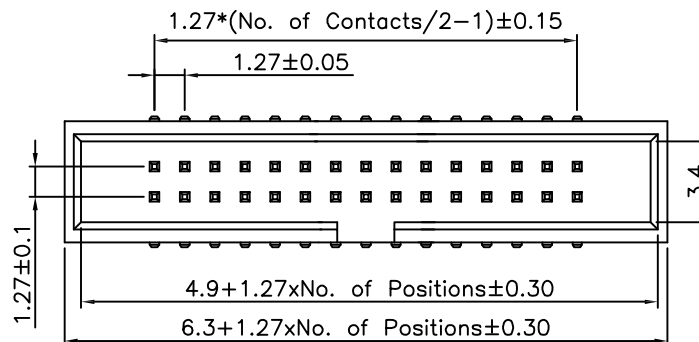

Recommended PCB Layout

5X				DR.BY.: Kenry	GENERAL TOLERANCE:		PART NO : B1273M-XXX-01-XX		HJBRIGHT[®] 東莞市華晶電子有限公司 BRIGHT-E ELECTRONIC TECHNOLOGY LIMITED			
4X					LINEAR	ANGLES	DWG. NO.:					
3X				CHKD.: Tony	x.: ±0.30	x': ±5.0°	TITLE : 1.27mm Pitch Box Header SMT Type		SHEET: 1/1			A4
2X					x.x: ±0.20	x.x': ±3.0°			SCALE: 1:1			
1X	ORIGINAL	Kenry		APPD.: Billy	x.xx: ±0.15	x.xx': ±2.0°	DATE: 30-Apr-2015		UNIT: mm			
REV.	DESCRIPTION	DR.BY	ECN. NO.		x.xxx: ±0.10	x.xxx': ±1.0°						