

Specifications:

Material And Finish:

Insulator:PA6T UL94V-0 Color:Black

LCP UL94V-0 Color:Black

Contact:Brass

Plated:See Ordering Information

Rating:

Current Rating:1.0 Amp

Voltage Rating:100V AC/DC




Operating Temperature Range:-40°~+105°C

Electrical:

Contact resistance:40m Ohm Max

Insulator resistance:500M ohm min.

Withstanding Voltage:500V AC/Minute

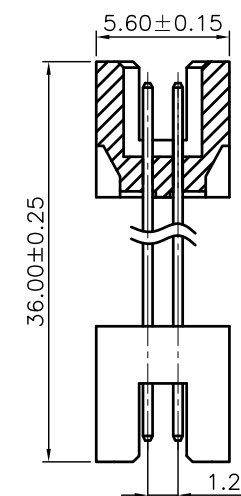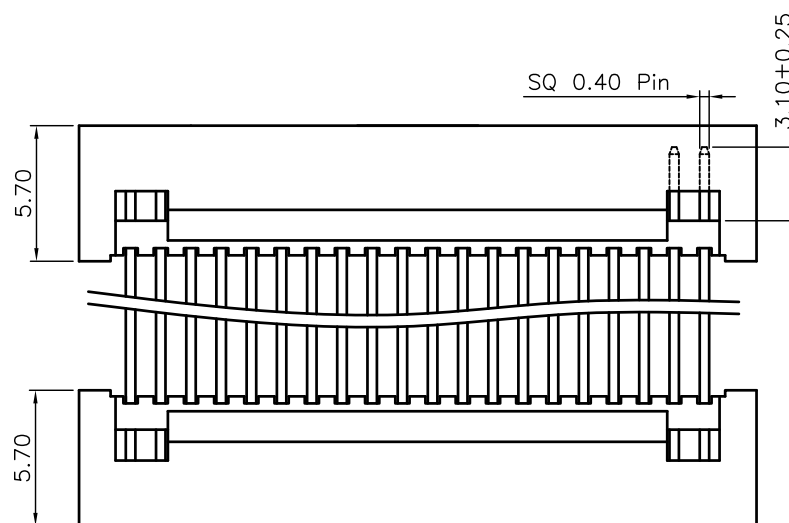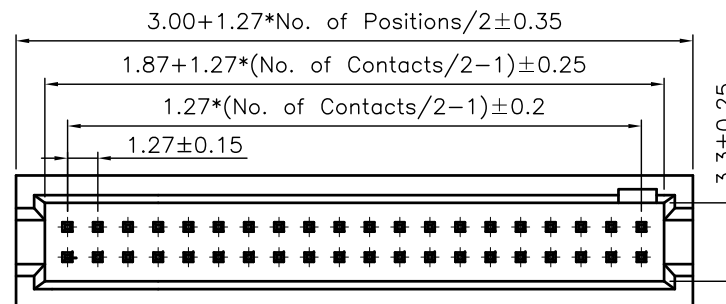

Ordering Information

B12712S-XXX-01-NX

1 2 3 4 56

1:—Series No.

2:—S: Straight Type

3:—No. of Positions

4:—A: Gold Flash

H: Selective Gold Plated

Q: Tin Plated

5:—N: PA6T UL94V-0 Color: Black

C: LCP UL94V-0 Color: Black

6:—A: In bag

B: In Tube

C: In Tray

5X				DR.BY.: TSW	GENERAL TOLERANCE:		PART NO : B12712S-XXX-01-XX	HJBRIGHT® 東莞市華晶電子有限公司 BRIGHE-E ELECTRONIC TECHNOLOGY LIMITED		SHEET: 1/1		A4
4X				CHKD.: Ren	LINEAR	ANGLES	DWG. NO.:					
3X				APPD.: Billy	X.: ±0.30	X': ±5.0°	TITLE : 1.27mm Pitch Box Header Straight Type	DATE: 13-JUL-2020	UNIT: mm	SCALE: 1:1	THIRD ANGLE PROJECTION	
2X					X.X: ±0.20	X.X': ±3.0°						
1X	ORIGINAL	Tsw			X.XX: ±0.15	X.XX': ±2.0°						
REV.	DESCRIPTION	DR.BY	ECN. NO		X.XXX: ±0.10	X.XXX': ±1.0°						
	1	2	3		4	1	5	6	7	8		