

RoHS Compliant

Specifications:**Material And Finish:**

Insulator:Nylon 6T UL94V-0 Color:Black

Contact:Brass

Plated:See Ordering Information

Rating:

Current Rating:3.0 Amp

Voltage Rating:250V AC/DC

Operating Temperature Range:-40°~+105°C

Electrical:

Contact resistance:30m Ohm Max

Insulator resistance:1000M ohm min.

Withstanding Voltage:500V AC/Minute

Ordering Information**B1273M-XXX164-0X**

1 2 3 4 5

1:—Series No.

2:—M:SMT Type

3:—No. of Positions

4:—A:Gold Flash

H:Selective Gold Plated




Q:Tin Plated

5:—A:In bag



B:In Tube

C:In Tray

F:W/Cap In Tape&Reel

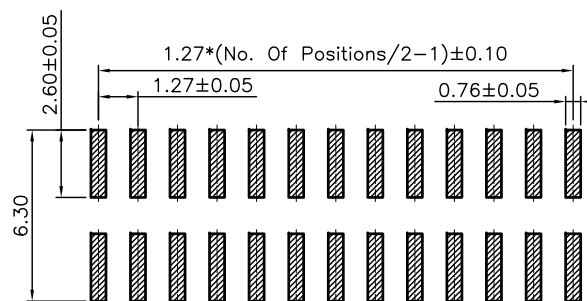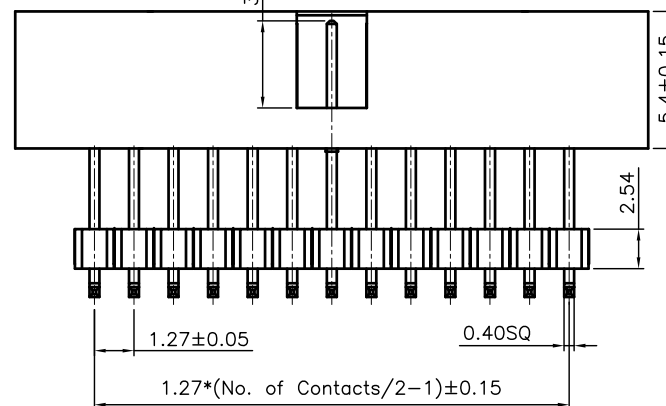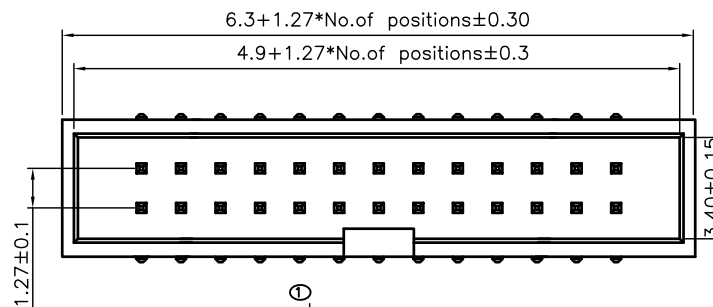

Recommended PCB Layout

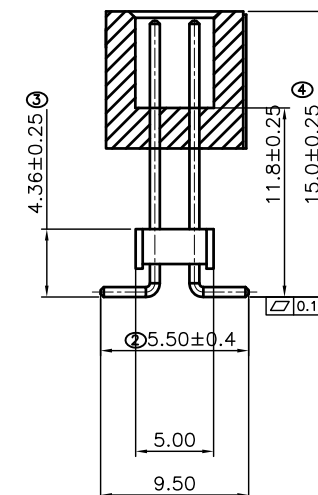

5X				DR.BY.: 曾冬明	GENERAL TOLERANCE:		PART NO : B1273M-XXX164-0X	HJBRIGHT® 東莞市華晶電子有限公司 BRIGHE-E ELECTRONIC TECHNOLOGY LIMITED		
4X						LINEAR	ANGLES			
3X				CHKD.: 朱 波	X.: ±0.30	X°: ±5.0°	TITLE : 1.27mm Pitch Box Header SMT Type	SHEET: 1/1		A4
2X					X.X: ±0.20	X.X°: ±3.0°		SCALE: 1:1		
1X	ORIGINAL	joy chen		APPD.:	X.XX: ±0.15	X.XX°: ±2.0°		UNIT: mm		
REV.	DESCRIPTION	DR.BY	ECN. NO		X.XXX: ±0.10	X.XXX°: ±1.0°	DATE: 17-May-2008	THIRD ANGLE PROJECTION		