

Specifications:**Material And Finish:**

Insulator:Nylon 6T UL94V-0 Color:Black

Contact:Brass

Plated:See Ordering Information

Rating:

Current Rating:1.0 Amp

Voltage Rating:100V AC/DC



Operating Temperature Range:-40~+105°C

Electrical:



Contact resistance:40m Ohm Max

Insulator resistance:500M ohm min.


Withstanding Voltage:500V AC/Minute

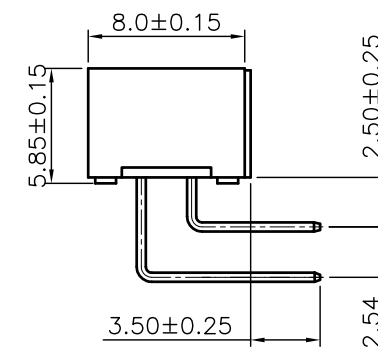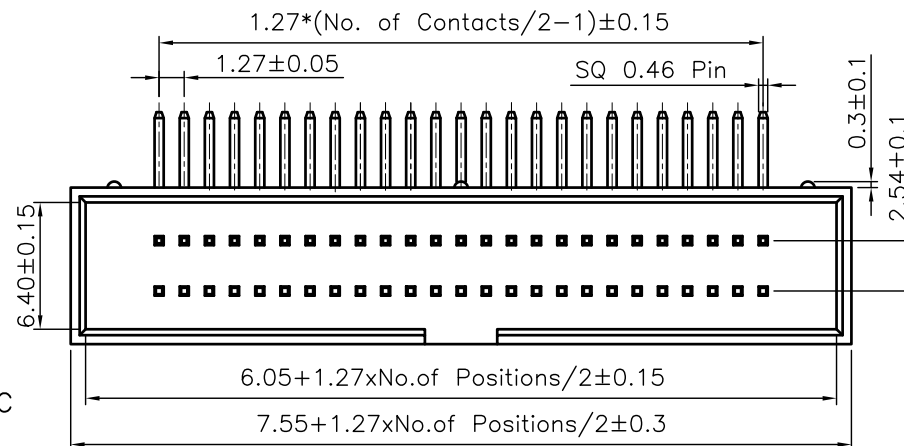

02

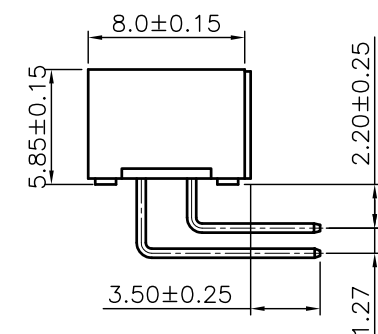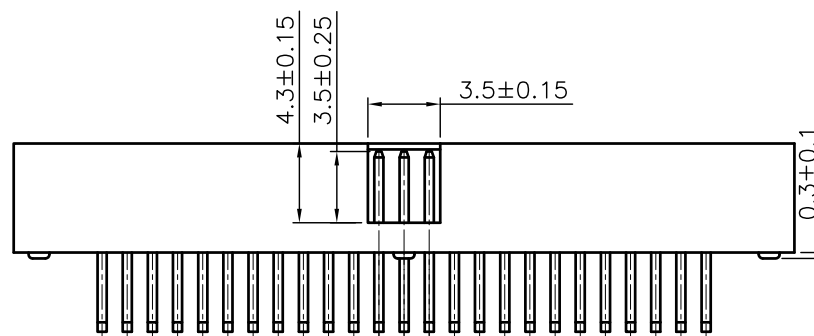

01

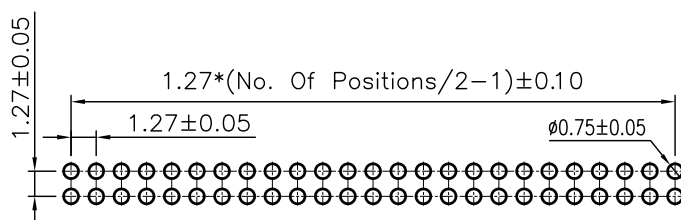

Recommended PCB Layout

Ordering Information**B2754R-XXX-XX-X**

1 2 3 4 5 6

1:— Series No.

2:— R:R/A Type

3:— No. of Positions

4:— A:Gold Flash

H:Selective Gold Plated


Q:Tin Plated

5:— 01:1.27mm

02:2.54mm

6:— A:In bag

B:In Tube

5X				DR.BY.: Tsw	GENERAL TOLERANCE:		PART NO : B2754R-XXX-XX-X	HJBRIGHT® 東莞市華晶電子有限公司 BRIGHE-E ELECTRONIC TECHNOLOGY LIMITED		
4X					LINEAR	ANGLES	DWG. NO.: RD0805-065			
3X				CHKD.: Ren	X.: ±0.30	X°: ±5.0°	TITLE : 1.27*2.54mm Pitch Box Header R/A Type	SHEET: 1/1		A4
2X					X.X: ±0.20	X.X°: ±3.0°		SCALE: 1:1		
1X	ORIGINAL	Tsw		APPD.: Billy	X.XX: ±0.15	X.XX°: ±2.0°		UNIT: mm		
REV.	DESCRIPTION	DR.BY	ECN. NO		X.XXX: ±0.10	X.XXX°: ±1.0°	DATE: 10-JUL-2020			