

Specifications:**Material And Finish:**

Insulator:Nylon 6T UL94V-0 Color:Black

Contact:Brass

Plated:See Ordering Information

Rating:

Current Rating:1.0 Amp

Voltage Rating:100V AC/DC

Operating Temperature Range:-40°~+105°C

Electrical:

Contact resistance:40m Ohm Max







Insulator resistance:500M ohm min.

Withstanding Voltage:500V AC/Minute

Ordering Information**B12721M-XXX-XX-X**

1 2 3 4 5 6

- 1: — Series No.
 2: — M:SMT Type
 3: — No. of Positions
 4: — A:Gold Flash
 H:Selective Gold Plated
 Q:Tin Plated
 5: — 01:19MM
 02:6.8MM
 03:9.58MM
 6: — A:In bag
 B:In Tube
 F:W/Cap In Tape&Reel

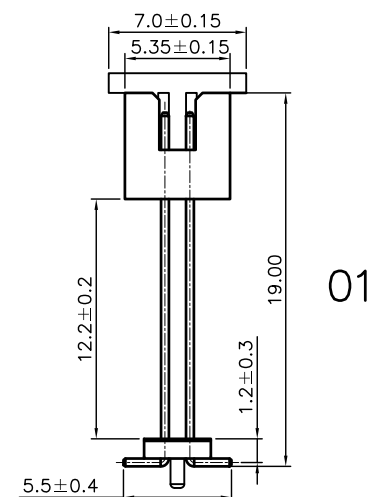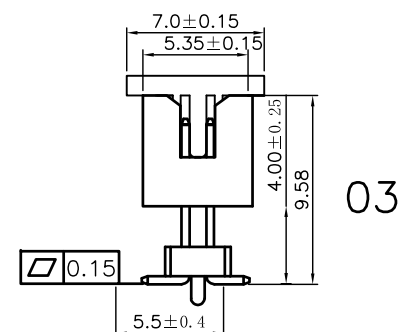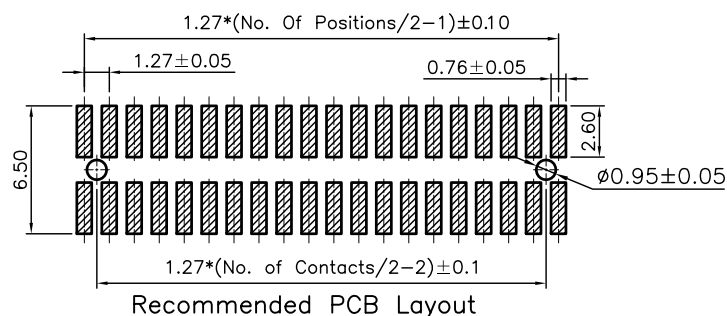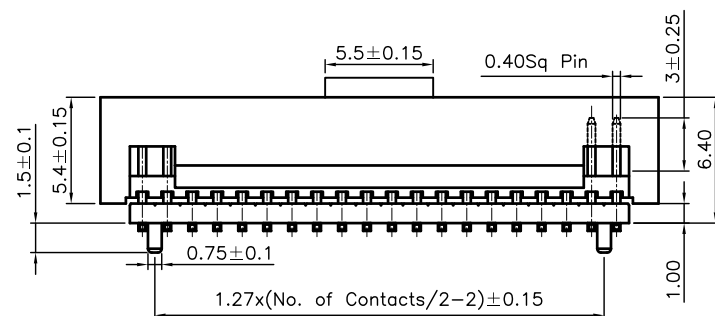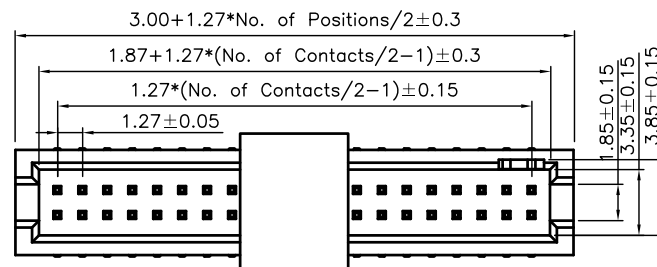

5X				DR.BY.: Tsw	GENERAL TOLERANCE:		PART NO : B12721M-XXX-XX-X	HJBRIGHT® 東莞市華晶電子有限公司 BRIGHT-E ELECTRONIC TECHNOLOGY LIMITED							
4X					LINEAR ANGLES		DWG. NO.: RD0805-060								
3X				CHKD.: Ren	x.: ±0.30	x': ±5.0°	TITLE : 1.27mm Pitch Box Header SMT Type	SHEET: 1/1			A4				
2X					x.x: ±0.20	x.x': ±3.0°		SCALE: 1:1							
1X	ORIGINAL	Tsw		APPD.: Billy	x.xx: ±0.15	x.xx': ±2.0°		DATE: 9-JUL-2020	UNIT: mm			THIRD ANGLE PROJECTION			
REV.	DESCRIPTION	DR.BY	ECN. NO		x.xxx: ±0.10	x.xxx': ±1.0°									
1		2		3		4		5		6		7		8	