

Specifications:**Material And Finish:**

Insulator:Nylon 6T UL94V-0 Color:Black

Contact:Brass

Plated:See Ordering Information

Rating:

Current Rating:1.0 Amp

Voltage Rating:100V AC/DC



Operating Temperature Range:-40°~+105°C

Electrical:



Contact resistance:40m Ohm Max

Insulator resistance:500M ohm min.


Withstanding Voltage:500V AC/Minute

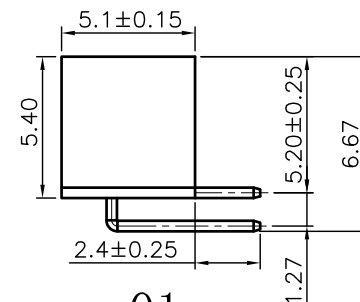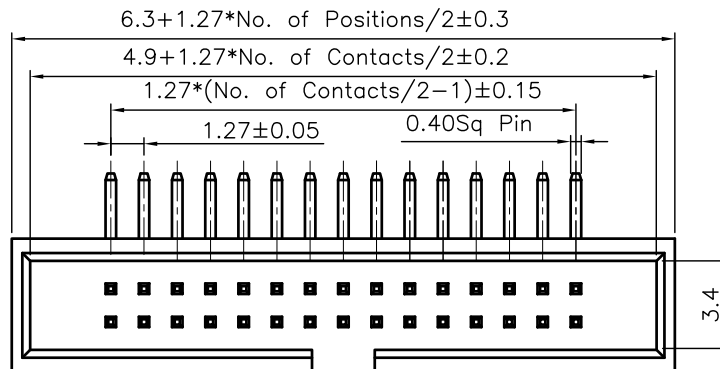

01

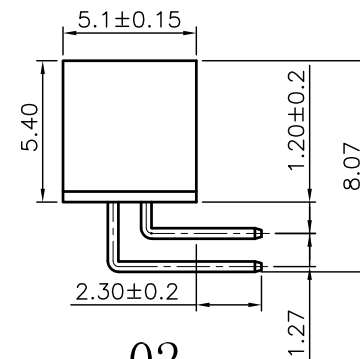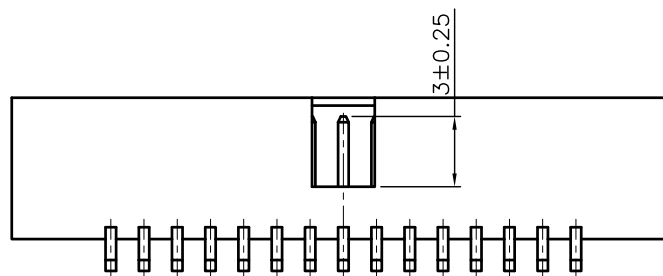

02

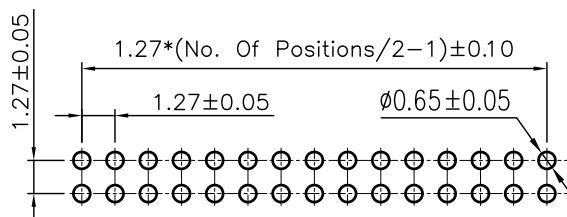

Recommended PCB Layout

Ordering Information**B1273R-XXX-XX-X**

1 2 3 4 5 6

1: — Series No.

2: — R:R/A Type

3: — No. of Positions

4: — A:Gold Flash

H:Selective Gold Plated

P:30u" Gold on contact;Gold flash on tail. ☒

Q:Tin Plated

5: — 01:6.67mm

02:8.07mm

6: — A:In bag

B:In Tube

5X				DR.BY.: Tsw	GENERAL TOLERANCE:		PART NO : B1273R-XXX-XX-X		HJBRIGHT® 東莞市華晶電子有限公司 BRIGHE-E ELECTRONIC TECHNOLOGY LIMITED			
4X					LINEAR ANGLES		DWG. NO.: RD0805-062					
3X				CHKD.: Ren	x.: ±0.30	x': ±5.0°	TITLE : 1.27mm Pitch Box Header R/A Type		SHEET: 1/1			A4
2X					x.x: ±0.20	x.x': ±3.0°			SCALE: 1:1			
1X	ORIGINAL	Tsw		APPD.: Billy	x.xx: ±0.15	x.xx': ±2.0°	DATE: 10-JUL-2020		UNIT: mm			
REV.	DESCRIPTION	DR.BY	ECN. NO.		x.xxx: ±0.10	x.xxx': ±1.0°						