


Plated:See Ordering Information

Operating Temperature Range: $-40^{\circ}\sim+105^{\circ}\text{C}$

Withstanding Voltage:500V AC/Minute

1	2	3	4	5	6
---	---	---	---	---	---

- 1:— Series No.
2:— M:SMT Type
3:— No. of Positions
4:— A:Gold Flash
H:Selective Gold Plated
Q:Tin Plated
5:— 01:CAP
02:NO CAP
6:— A:In bag
B:In Tube
F:W/Cap In Tape&Reel

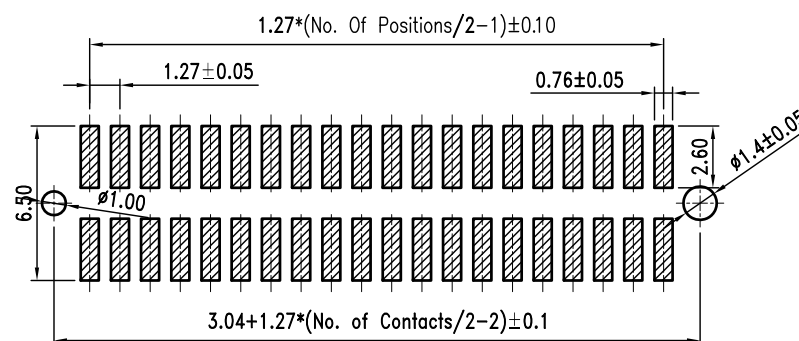

Technical drawing of a mechanical part, likely a bracket or support, showing dimensions and a cross-section. The drawing includes a top view with dimensions 5.6 ± 0.15 and 5.5 ± 0.25 , and a side view with a dimension of 5.9 ± 0.25 . A cross-section is shown on the right with a dimension of 0.15. The part is labeled 02.

5X			
4X			
3X			
2X			
1X	ORIGINAL	Tsw	
REV.	DESCRIPTION	DR.BY	ECN. NO

B

X.XXX: ± 0.10

X.XXX°: ±1.0°

DATE: 9-JUL-2020

UNIT: mm

THIRD ANGLE PROJECTION

A4