

Specifications:

Material And Finish:

Insulator:Nylon 6T UL94V-0 Color:Black

Contact:Brass

Plated:See Ordering Information

Rating:

Current Rating:2.0 Amp

Voltage Rating:150V AC/DC

Operating Temperature Range:-40°~+105°C

Electrical:

Contact resistance:30m Ohm Max

Insulator resistance:1000M ohm min.

Withstanding Voltage:500V AC/Minute

Ordering Information

B20021M-XXX-01-1X

1 2 3 4 5

1:— Series No.

2:— M:SMT Type

3:— No. of Positions

4:— A:Gold Flash




H:Selective Gold Plated

Q:Tin Plated


6:— A:In bag

B:In Tube

F:W/Cap In Tape&Reel

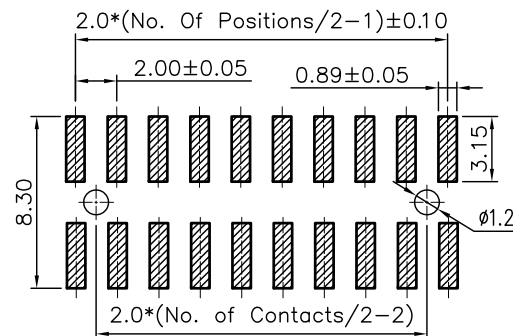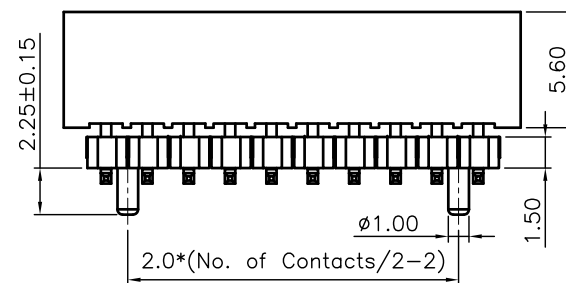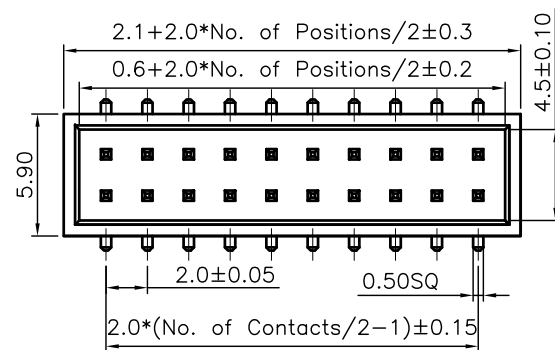


Recommended PCB Layout

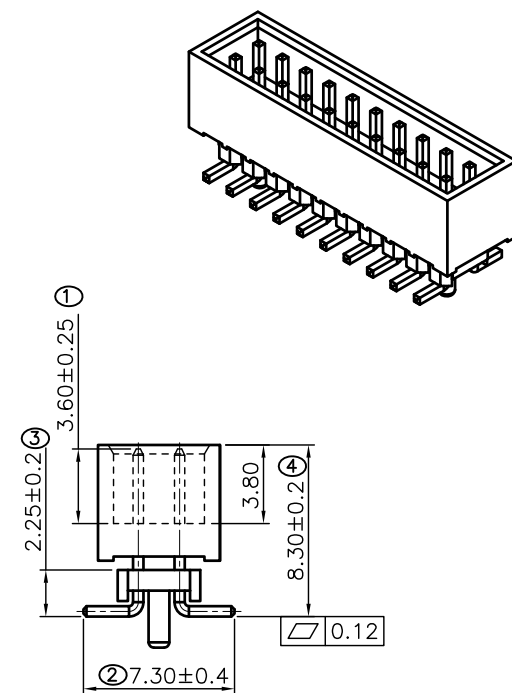

RoHS Compliant

5X				DR.BY.: joy chen	GENERAL TOLERANCE:		PART NO : B20021M-XXX-01-1X	BRIGHT 東莞市常平華晶電子廠 Dong Guan Bright Electronic Factory
4X					LINEAR	ANGLES	DWG. NO.: RD0805-081	
3X				CHKD.: jerry Liu	X.: ±0.30	X': ±5.0°	TITLE : 2.0mm Pitch Box Header SMT Type	
2X					X.X: ±0.20	X.X': ±3.0°		
1X	ORIGINAL	joy chen		APPD.: Peter Li	X.XX: ±0.15	X.XX': ±2.0°		
REV.	DESCRIPTION	DR.BY	ECN. NO.		X.XXX: ±0.10	X.XXX': ±1.0°	DATE: 19-May-2008	SHEET: 1/1 SCALE: 1:1 UNIT: mm



THIRD ANGLE PROJECTION

A4