




Plated:See Ordering Information

Operating Temperature Range: $-40^{\circ}\sim+105^{\circ}\text{C}$


Withstanding Voltage:500V AC/Minute

$$\overline{1} \quad \overline{2} \quad \overline{3} \quad \overline{4} \quad \overline{5}$$


- 1:— Series No.
- 2:— R:R/A Type
- 3:— No. of Positions
- 4:— A:Gold Flash
H:Selective Gold Plated
Y:30u" Gold on contact;Matte Tin on tail
Q:Tin Plated
- 5:— A:In bag
B:In Tube

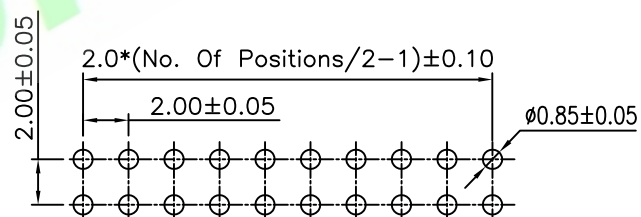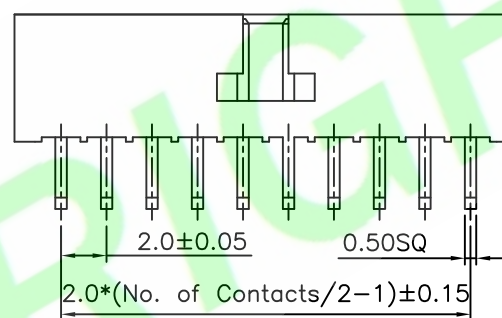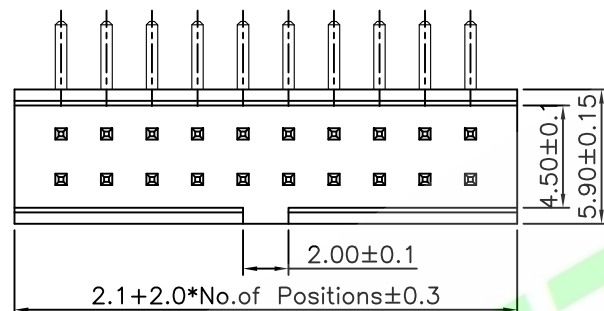

Recommended PCB Layout

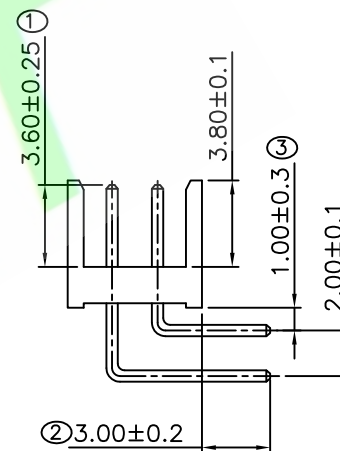

RoHS Compliant

5X				DR.BY.: joy chen	GENERAL TOLERANCE:		PART NO : B2003R-XXX-01-X		HJBRIGHT 東莞市華晶電子有限公司 BRIGHE-E ELECTRONIC TECHNOLOGY LIMITED		
4X					LINEAR	ANGLES	DWG. NO.: RD0805-83				
3X				CHKD.: jerry Liu	x.: ±0.30	x': ±5.0"	TITLE : 2.0mm Pitch Box Header R/A Type				
2X					x.x: ±0.20	x.x': ±3.0"					
1X	ORIGINAL	joy chen		APPD.: <i>Peter Li</i>	x.xx: ±0.15	x.xx': ±2.0"	DATE: 17-May-2008		SHEET: 1/1	 THIRD ANGLE PROJECTION	A4
REV.	DESCRIPTION	DR.BY	ECN. NO.		x.xxx: ±0.10	x.xxx': ±1.0"			SCALE: 1:1		
									UNIT: mm		

A4